


POLEMOUNT TYPE ONAN 60Hz 65°C

1 PH.	100 kVA	SERIAL No	
IMPEDANCE AT 85°C	%	VOL. OF OIL	L
BIL	95X125 kV	TOTAL MASS	kg
H.V.	7200/12470Y V	X	14400/24940Y V
L.V.	120/240 V		< 2 PPM PCB

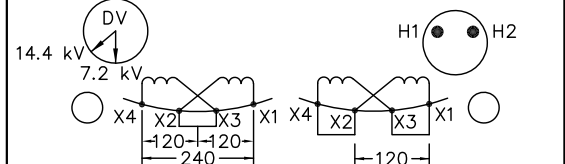


DV	TAPS CHANGER (TC)				
POSITIONS	1	2	3	4	5
14.4 kV	105 %	102.5 %	100 %	97.5 %	95 %
7.2 kV	105 %	102.5 %	100 %	97.5 %	95 %

WARNING: OPERATE SWITCHES ONLY WHEN TRANSFORMER IS DE-ENERGIZED
 ENERGY EFFICIENCY PER CAN/CSA C802.1

P.O. No. DATE

BUILT TO CSA C2.2 MFR. REF.No. TAO100DMA1HL001

ABB QUEBEC, CANADA R00



- NOTES:**
- MEET REQUIREMENTS OF APPLICABLE CSA C2.2-06 SPECIFICATION
 - MARKING ACCORDING TO CSA C2.2-06 SPECIFICATION

- FINISH:**
- ACCORDING TO CSA C2.2-06 SPECIFICATION CLAUSE 8.10

CALCULATED VALUES	
% IZ	: 2.8 %
OIL	: 212 L
WEIGHT	: 520 Kg

no. REVISIONS	date	DESCRIPTION	BY	APPR.
FILE NO: TAO100DMA1HL001	DRAWN. A.T.	DATE: 2017/09/05	DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED	
	ELEC.APP. A.A.	DATE: 2017/09/05	MANUFACTURER	NUMBER
	MEC.APP. A.T.	DATE: 2017/09/05	1LCA TAO100DMA1HL001	
	SCALE: 1=15			