



Revisions

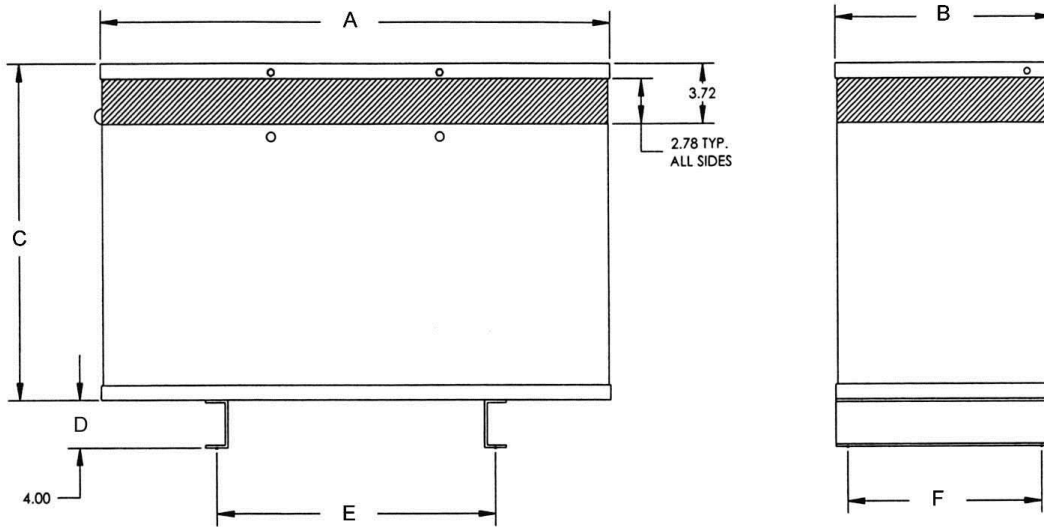

PRIMARY: 600 Volts
SECONDARY: 480 Volts
TAPS: 2, 5% BNFC

NOTES:
 1. DENOTES CONDUIT AREA.

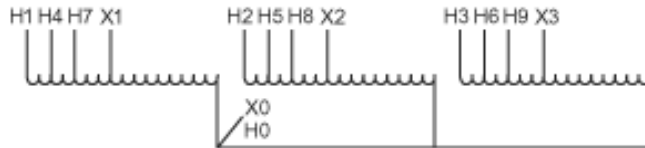

| Primary Volts | Alt Rating | Connect Primary Lines To | Inter-Connect | Connect Secondary Lines To |
|-----------------|----------------|--------------------------|---------------|----------------------------------|
| 600 | 480 | H1, H2, H3 | | |
| 570 | 456 | H4, H5, H6 | | |
| 540 | 432 | H7, H8, H9 | | |
| Secondary Volts | | | | |
| 480 | 380 | | | X1, X2, X3 |
| 277 1 phase | 220 1 phase | | | X1 to X0 X2 to X0 X3 to X0 |

| KVA | CATALOG NUMBER | VOLTAGE | | Enclosure | WEIGHT | PHASE | FREQ. |
|-------|--------------------|-------------|-------------------|------------------------|-----------------|-------------------|-------|
| | | HIGH | LOW | | | | |
| 75/60 | T-3-52710-1 (Auto) | 600/480 | 480/380 | NEMA-3R | 300 Lbs | 3 ϕ | 60 Hz |
| Auto | A | B | C | D | E | F | |
| (In.) | 20.30 | 9.03 | 14.86 | 4.00 | 13.25 | 7.00 | |
| | Windings: | Insulation: | Temperature Rise: | Typ. Efficiency @ 35%: | No Load Losses: | Full Load Losses: | |
| | AL | 180°C | 115°C | 99.54% | 87.21W | 296.26W | |



| | |
|----------|-------|
| Type No. | |
| DRAWN: | |
| DESIGN | |
| CHK. | APP. |
| MAT'L | |
| FINISH | |
| SCALE | SHEET |