



Beaver Electrical Machinery Ltd.

Date: September 9, 2022

Technical Documentation

# **FD0/34**

## **Farm Duty | BEGCFD**

Beaver Electrical Machinery Ltd.  
Date: September 9, 2022

	Beaver Electrical Machinery Ltd.
	Date: September 9, 2022

### Technical Data Sheet

Motor Type: BEGCFD	Catalogue No: FD0/34
--------------------	----------------------

#### Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
0.33	4	1770	56	115 / 230	60	1
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous		-40 to 40 °C	<1000 m

#### Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
53				47		
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
0.14	450		400		8.8 / 4.4	44 / 22
NEMA KVA Code	Inertia (WR <sup>2</sup> )			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft <sup>2</sup> )	NEMA Load (lb-ft <sup>2</sup> )	Max. Allowable (lb-ft <sup>2</sup> )	Cold	Hot	
	0.066					

#### VFD Duty Information

Max HP	Current (A)	Speed Range		VFD		S.F.
		Constant Torque	Variable Torque	Carrier Hz	Type	

#### Hazardous Locations Information

Temp Code (Sinewave / VFD)	/
----------------------------	---

#### Additional Certifications

Other Certification
---------------------

#### Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6205ZZ	6203ZZ	32



Beaver Electrical Machinery Ltd.


Date: September 9, 2022

**Nameplate Drawing**

# Farm Duty

TYPE	BEGCFD	CAT. NO.	FD0/34		
OUTPUT	0.33 HP 0.25 kW	FRAME	56	TEFC	
R.P.M.	1770	POLE	4	INS.	F
VOLTS	115 / 230	PHASE	1	Hz	60
AMPS	8.8 / 4.4	CODE		S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 53		MIN. EFF.	
BEARINGS	6205ZZ / 6203ZZ			RATING Cont.	
SER. NO.	TBD	DESIGN		WT. 32 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	

**Connection Diagram**

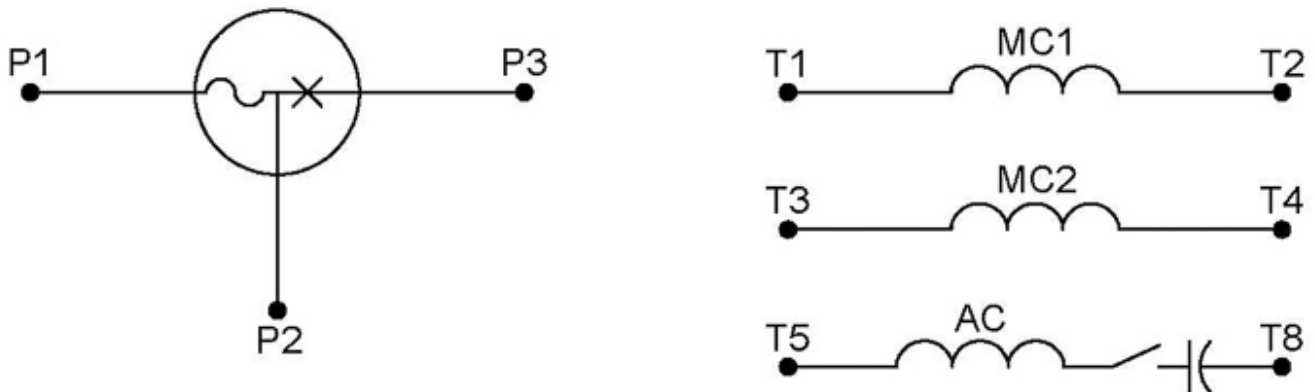

9 LEAD DUAL VOLTAGE		CAPACITOR START		
VOLTAGE	ROTATION	L1	L2	JOIN
HIGH	CCW	P1	4	2&3&5, P2&8
	CW	P1	4	2&3&8, P2&5
LOW	CCW	P1	2,4,5	P2,3,8
	CW	P1	2,4,8	P2,3,5

WD\_9CS