



Technical Documentation

APH00365-841

Advantage Plus IEEE 841 | AEHH8B


Beaver Electrical Machinery Ltd.

Date: July 25, 2022



Dimensional Drawing

Catalogue	Type	HP	RPM	Voltage	Hz	Frame Size
APH00365-841	AEHH8B	3	1200	575	60	213T

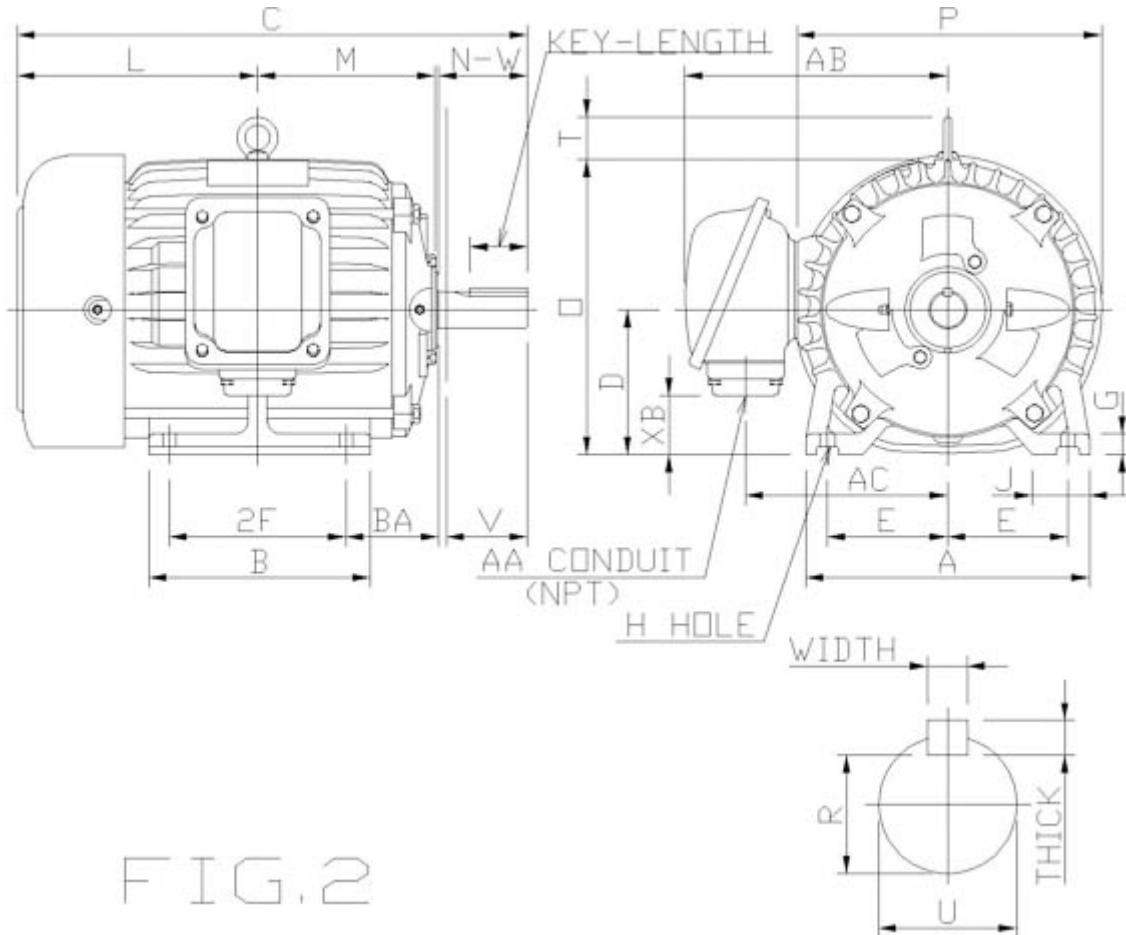



Mounting					A	B	C	CL1	CL2	D	G
E	2F1	2F2	H	BA							
4.25	5.5		0.41	3.5	9.85	6.89	18.26			5.25	0.7

J	K	L	M	O	P	T
1.75		8.63	6.1	10.62	11.1	1.65

Terminal Housing			
AA	AB	AC	XB
NPT1"	9.78	7.34	2.34

Shaft Extension			Key			Keyseat
N-W	U	V	Width	Thick	Length	R
3.38	1.375	3.3	0.312	0.312	2.41	1.201

Bearings		Weight Lbs	Drive Method	Dimensions
DE	NDE			
6308ZC3	6306ZC3	165	Direct Coupling / Belt Drive	Inches

	Beaver Electrical Machinery Ltd.	
	Date: July 25, 2022	

Technical Data Sheet

Motor Type: AEHH8B	Catalogue No: APH00365-841
--------------------	----------------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
3	6	1175	213T	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
89.5	87.5	89.5	87.5	78	70.5	85.5
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
13.41	210	180	340	1.7	3.2	25.6
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
K	0.918	44	378	88	62	54

VFD Duty Information

Max HP	Current (A)	Speed Range		VFD		S.F.
		Constant Torque	Variable Torque	Carrier Hz	Type	
3	3.22	6-60Hz	3-60Hz	3-6kHz	VPWM or CPWM	1

Hazardous Locations Information



CSA Certified
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA
Temp Code (Sinewave / VFD)
T3C / T3C

Additional Certifications

Other Certification

Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6308ZC3	6306ZC3	165


	Beaver Electrical Machinery Ltd.	
	Date: July 25, 2022	

Nameplate Drawing

Advantage Plus IEEE 841					
TYPE	AEHH8B	CAT. NO.	APH00365-841		
OUTPUT	3 HP 2.24 kW	FRAME	213T	TEFC	
R.P.M.	1175	POLE	6	INS.	F
VOLTS	575	PHASE	3	Hz	60
AMPS	3.2	CODE	K	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 89.5		MIN. EFF. 87.5	
BEARINGS	6308ZC3 / 6306ZC3			RATING Cont.	
SER. NO.	TBD	DESIGN	B	WT. 165 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	6-60Hz	60-120Hz	1	



Connection Diagram

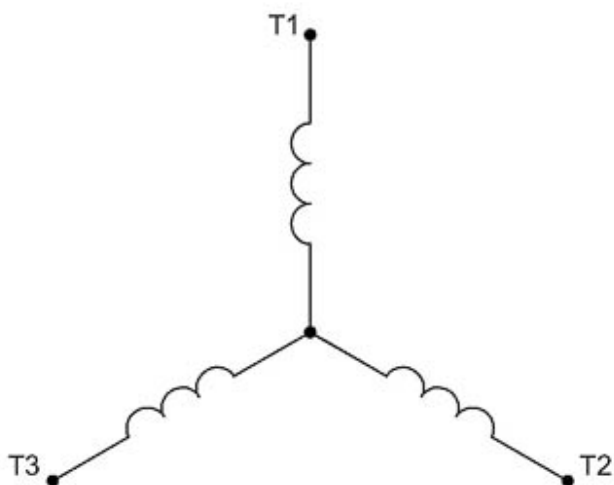


3 LEAD		SINGLE VOLTAGE			WYE
VOLTAGE	CONN.	L1	L2	L3	
-	WYE	1	2	3	

WD_3Y



Thermal Limit Curves

Motor Type: AEHH8B		Catalogue No: APH00365-841		Family: Advantage Plus IEEE 841	
HP	3	Safe Stall Time		Full Load A	3.2 A
Voltage	575V 60Hz	Hot	62 s	% Inrush	795 %
RPM	1200	Cold	88 s	Locked Rotor A	25.6 A

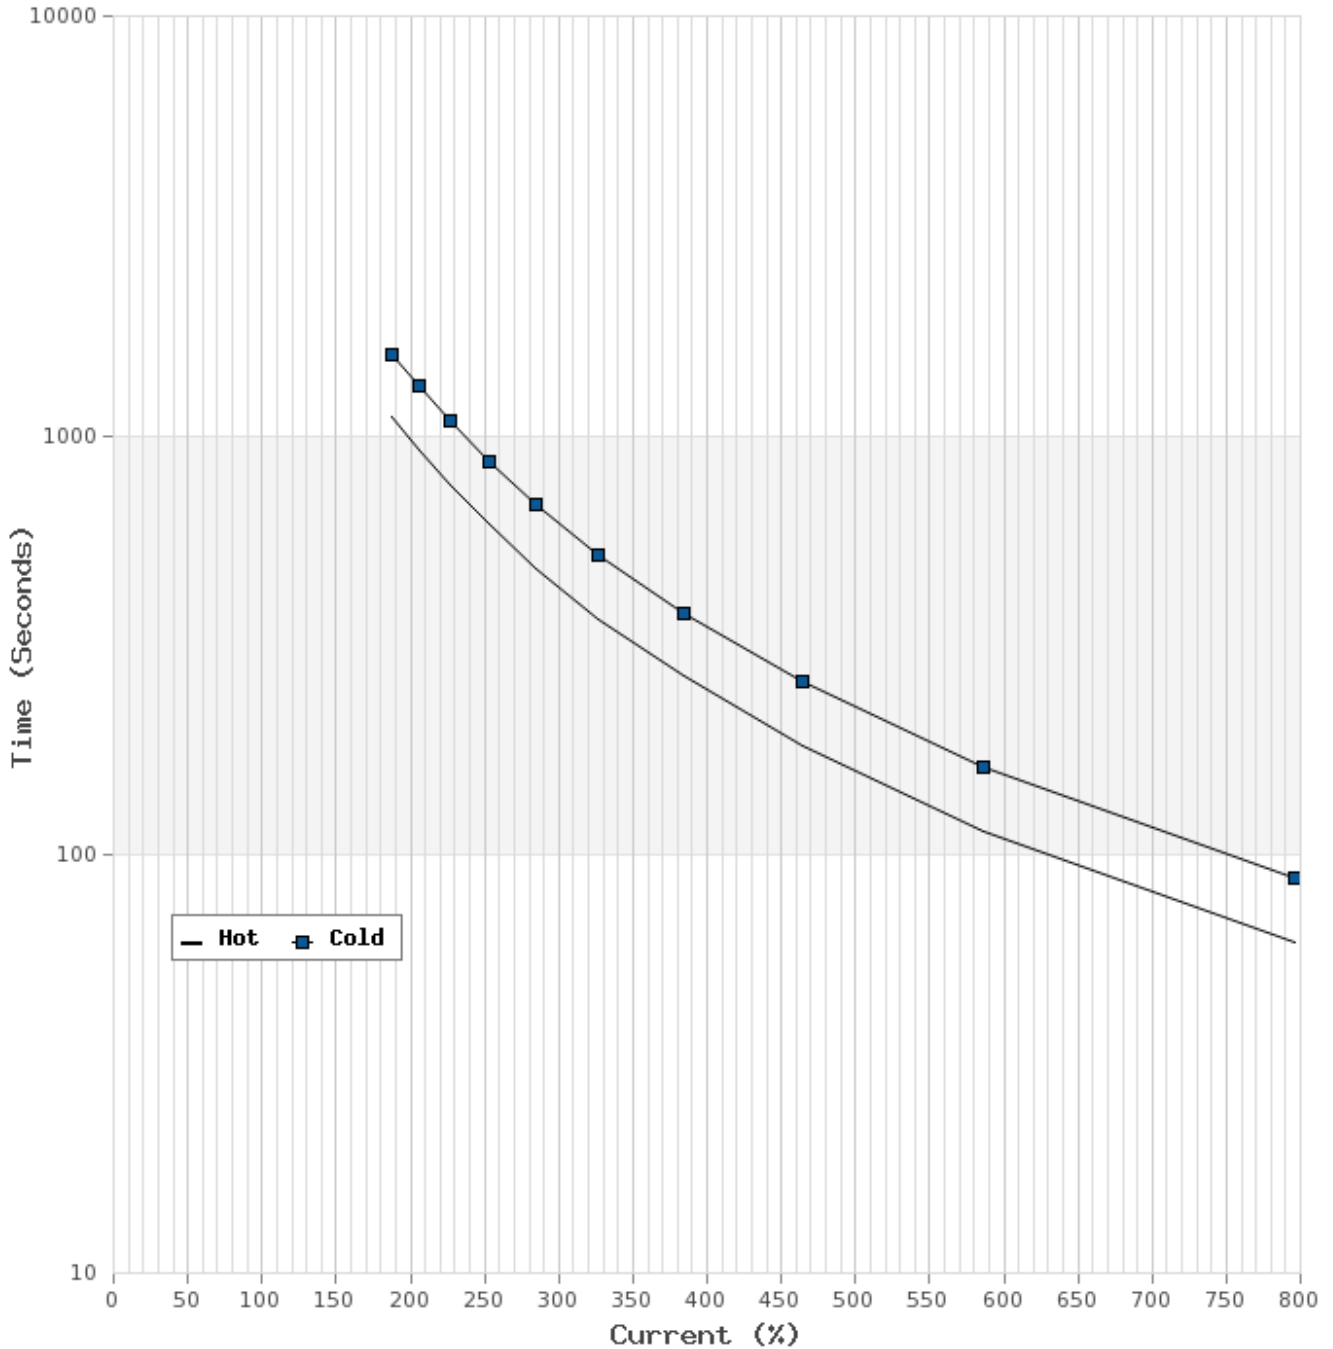



T-N and I-N Curves

Motor Type: AEHH8B		Catalogue No: APH00365-841		Family: Advantage Plus IEEE 841	
HP	3	Full Load T	13.41 lb-ft	Full Load A	3.2 A
Voltage	575V 60Hz	Locked Rotor T	210 %	Locked Rotor A	25.6 A
RPM	1200	Pull Up T	180 %	Break Down T	340 %

