

	Beaver Electrical Machinery Ltd.	
	Date: July 25, 2022	

Technical Documentation

APH01045-841


Advantage Plus IEEE 841 | AEHH8B

Beaver Electrical Machinery Ltd.
Date: July 25, 2022

	Beaver Electrical Machinery Ltd.	
	Date: July 25, 2022	

Dimensional Drawing

Catalogue	Type	HP	RPM	Voltage	Hz	Frame Size
APH01045-841	AEHH8B	10	1800	575	60	215T

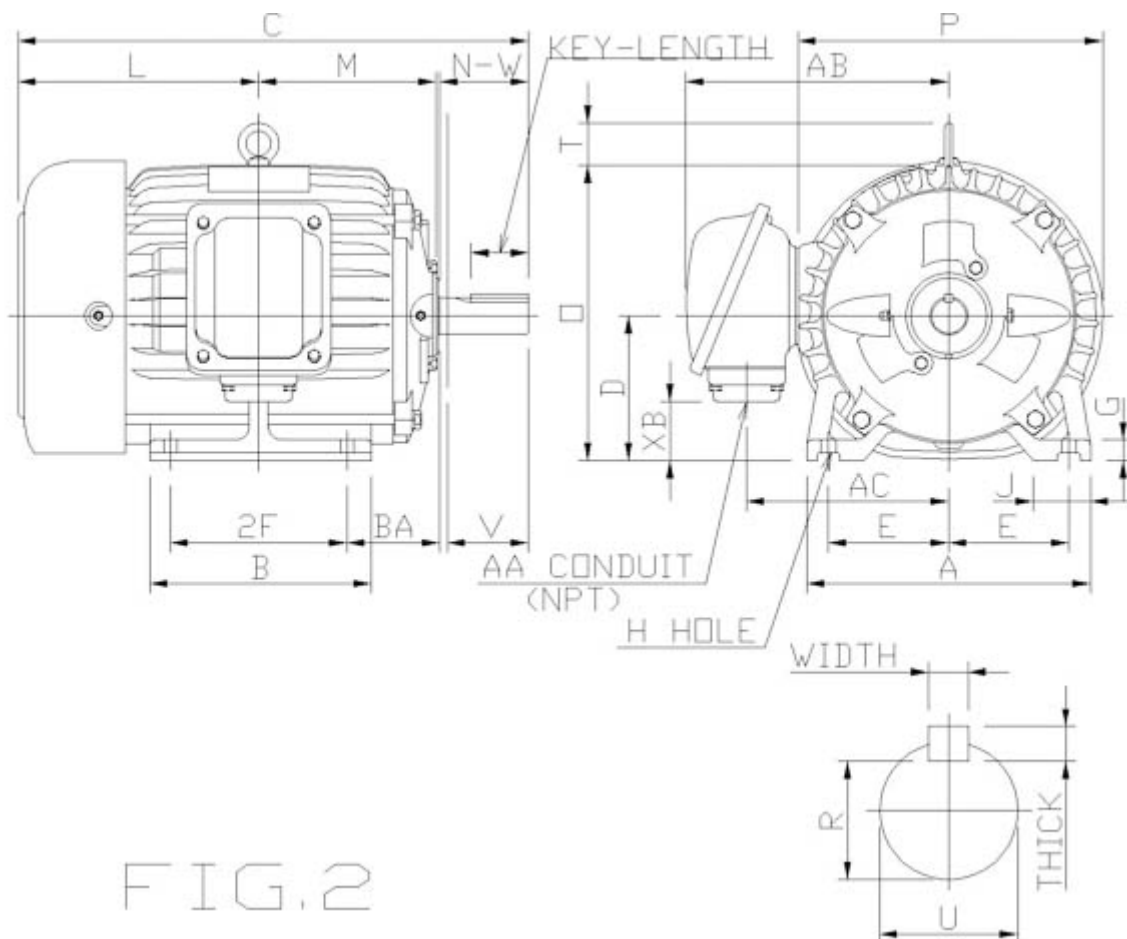

Mounting					A	B	C	CL1	CL2	D	G
E	2F1	2F2	H	BA							
4.25	7	5.5	0.41	3.5	9.85	8.35	19.76			5.25	0.7

J	K	L	M	O	P	T
1.75		9.38	6.85	10.62	11.1	1.65

Terminal Housing			
AA	AB	AC	XB
NPT1"	9.78	7.34	2.34

Shaft Extension			Key			Keyseat
N-W	U	V	Width	Thick	Length	R
3.38	1.375	3.3	0.312	0.312	2.41	1.201

Bearings		Weight Lbs	Drive Method	Dimensions
DE	NDE			
6308ZC3	6306ZC3	200	Direct Coupling / Belt Drive	Inches

	Beaver Electrical Machinery Ltd.	
	Date: July 25, 2022	

Technical Data Sheet

Motor Type: AEHH8B	Catalogue No: APH01045-841
--------------------	----------------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
10	4	1755	215T	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
91.7	90.2	91	91	88	84	75.5
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
29.92	250	145	260	2.7	9.3	64.8
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
H	1.082	51	175	40	28	60

VFD Duty Information

Max HP	Current (A)	Speed Range		VFD		S.F.
		Constant Torque	Variable Torque	Carrier Hz	Type	
10	9.28	6-60Hz	3-60Hz	3-6kHz	VPWM or CPWM	1

Hazardous Locations Information

Additional Certifications

CSA Certified	Other Certification
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	
Temp Code (Sinewave / VFD)	T3C / T3B

Additional Information


Bearings		Approx. Weight
DE	NDE	lbs
6308ZC3	6306ZC3	200

	Beaver Electrical Machinery Ltd.	
	Date: July 25, 2022	

Nameplate Drawing

Advantage Plus IEEE 841					
TYPE	AEHH8B		CAT. NO.	APH01045-841	
OUTPUT	10 HP 7.46 kW		FRAME	215T	TEFC
R.P.M.	1755		POLE	4	INS. F
VOLTS	575		PHASE	3	Hz 60
AMPS	9.3		CODE	H	S.F. 1.15
AMBIENT	40 °C		NOM. EFF. 91.7		MIN. EFF. 90.2
BEARINGS	6308ZC3 / 6306ZC3				RATING Cont.
SER. NO.	TBD		DESIGN	B	WT. 200 LBS
PWM VFD DUTY	VT	CT	CP		S.F.
	3-60Hz	6-60Hz	60-120Hz		1

Connection Diagram

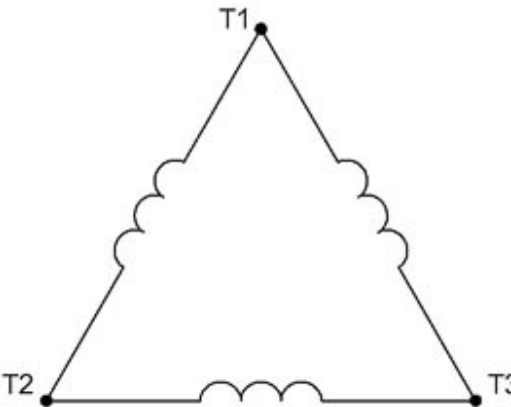


3 LEAD		SINGLE VOLTAGE			DELTA
VOLTAGE	CONN.	L1	L2	L3	
-	DELTA	1	2	3	

WD_3D

Thermal Limit Curves

Motor Type: AEHH8B		Catalogue No: APH01045-841		Family: Advantage Plus IEEE 841	
HP	10	Safe Stall Time		Full Load A	9.3 A
Voltage	575V 60Hz	Hot	28 s	% Inrush	698 %
RPM	1800	Cold	40 s	Locked Rotor A	64.8 A

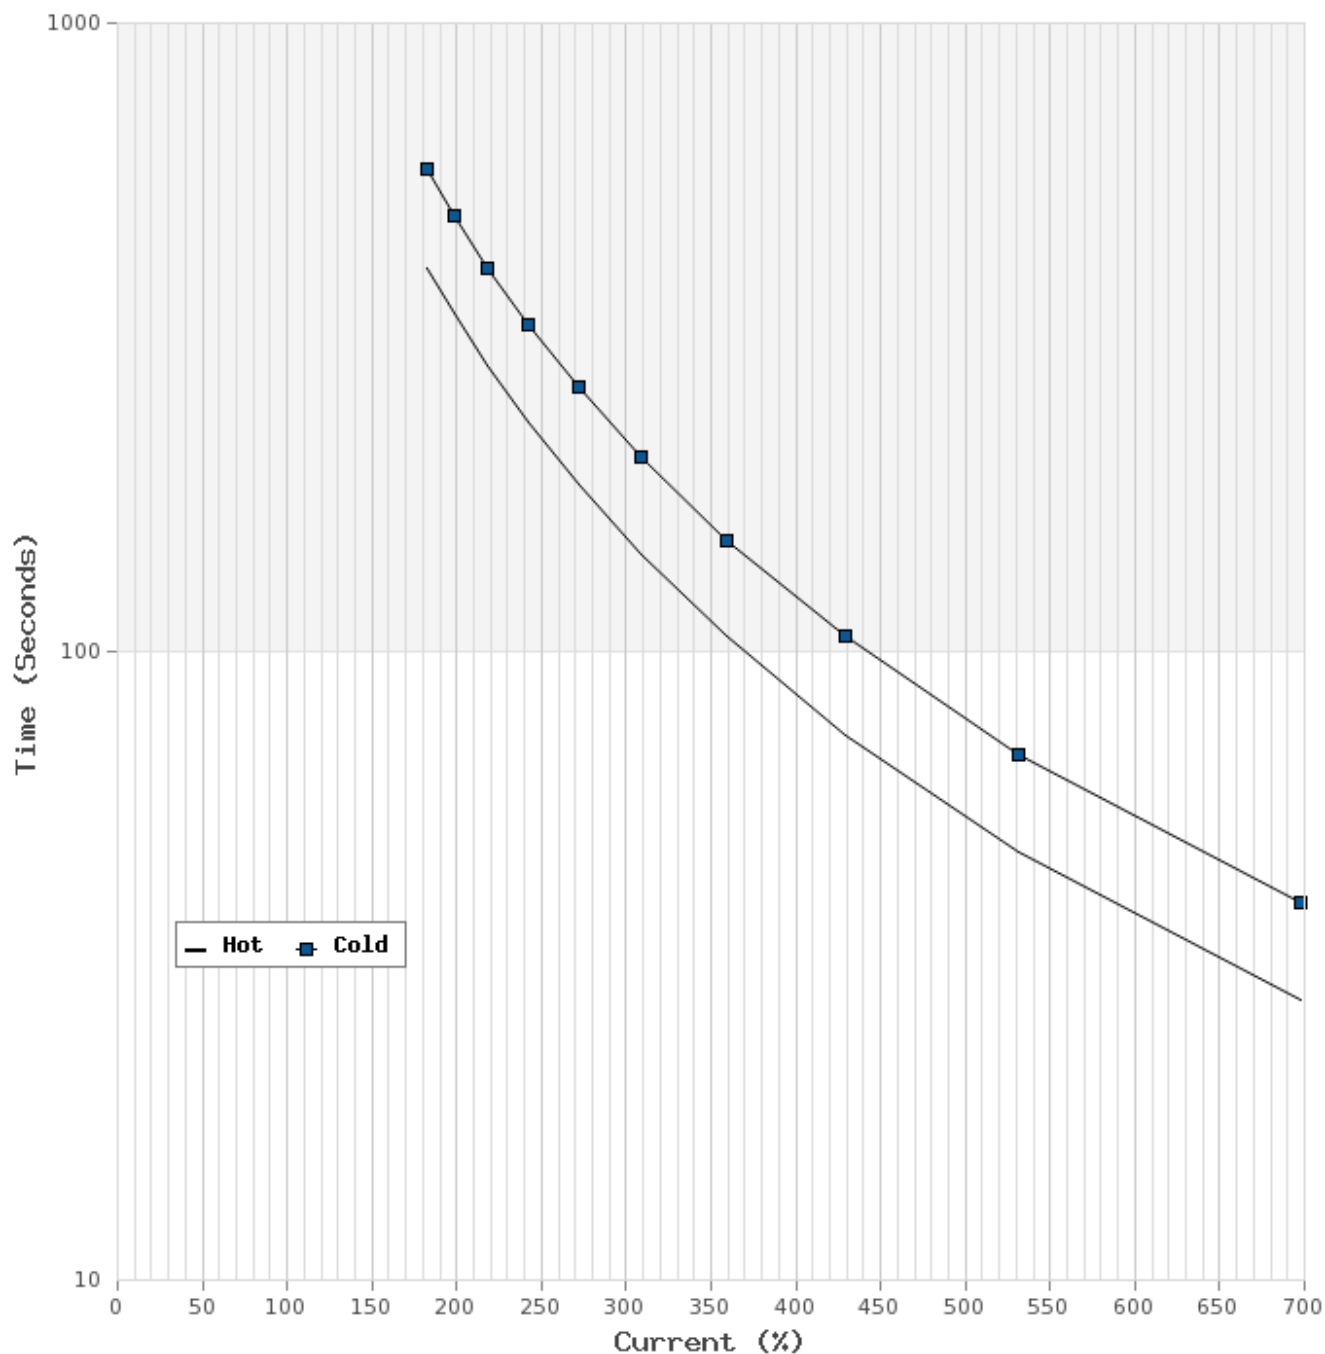

T-N and I-N Curves

Motor Type: AEHH8B		Catalogue No: APH01045-841		Family: Advantage Plus IEEE 841	
HP	10	Full Load T	29.92 lb-ft	Full Load A	9.3 A
Voltage	575V 60Hz	Locked Rotor T	250 %	Locked Rotor A	64.8 A
RPM	1800	Pull Up T	145 %	Break Down T	260 %

