

	Beaver Electrical Machinery	
	Date: June 6, 2022	

Technical Documentation

APH25065-841


Advantage Plus IEEE 841 | AEHH8B

Beaver Electrical Machinery
Date: June 6, 2022

	Beaver Electrical Machinery	
	Date: June 6, 2022	

Dimensional Drawing

Catalogue	Type	HP	RPM	Voltage	Hz	Frame Size
APH25065-841	AEHH8B	250	1200	575	60	449T

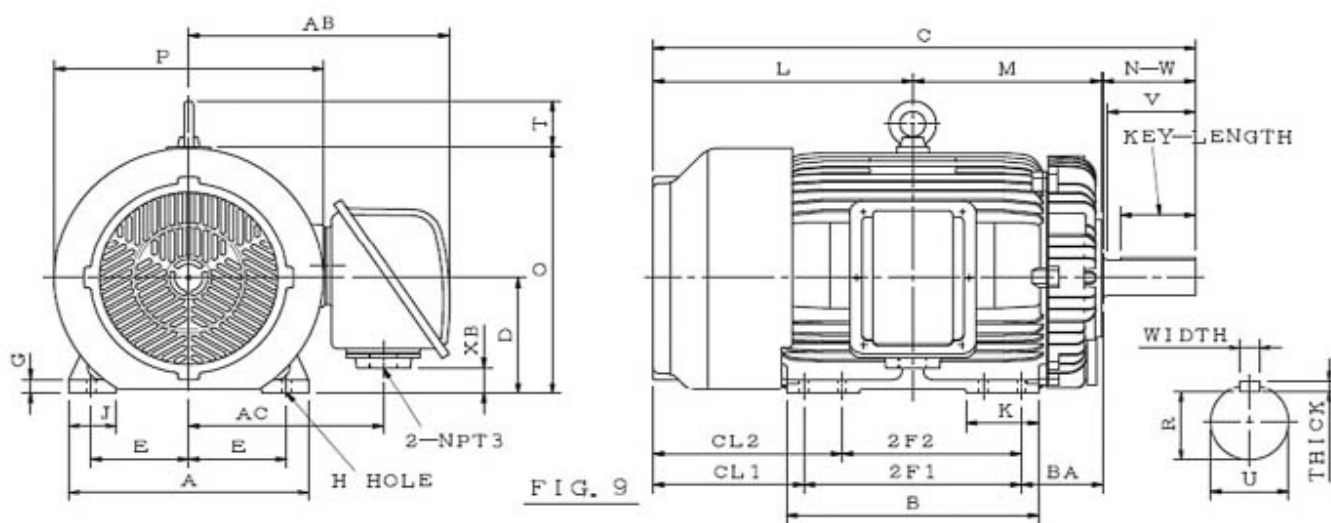

Mounting					A	B	C	CL1	CL2	D	G
E	2F1	2F2	H	BA							
9	25	20	0.81	7.5	22.05	27.95	54.9	13.9		11	1.4

J	K	L	M	O	P	T
4.35	8.25	26.4	19.65	23.55	24.75	7.33

Terminal Housing			
AA	AB	AC	XB
2-NPT3	24	17.9	2.4

Shaft Extension			Key			Keyseat
N-W	U	V	Width	Thick	Length	R
8.5	3.375	8	0.875	0.875	6.91	2.88

Bearings		Weight Lbs	Drive Method	Dimensions
DE	NDE			
6320C3	6316C3	2684	Direct Coupling / Belt Drive	Inches

	Beaver Electrical Machinery	
	Date: June 6, 2022	

Technical Data Sheet

Motor Type: AEHH8B	Catalogue No: APH25065-841
--------------------	----------------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
250	6	1188	449T	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
95.8	95	95.4	94.5	84.5	82	74.5
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
1104	110	90	210	61.5	231.3	1460
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
G	140	2744	6860	16	12	79

VFD Duty Information

Max HP	Current (A)	Speed Range		VFD		S.F.
		Constant Torque	Variable Torque	Carrier Hz	Type	
250	231.33	20-60Hz	3-60Hz	3-6kHz	VPWM or CPWM	1

Hazardous Locations Information

Additional Certifications

CSA Certified	Other Certification
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	
Temp Code (Sinewave / VFD)	T3C / T3

Additional Information


Bearings		Approx. Weight
DE	NDE	lbs
6320C3	6316C3	2684

	Beaver Electrical Machinery	
	Date: June 6, 2022	

Nameplate Drawing

Advantage Plus IEEE 841					
TYPE	AEHH8B		CAT. NO.	APH25065-841	
OUTPUT	250 HP 186.5 kW		FRAME	449T	TEFC
R.P.M.	1188		POLE	6	INS. F
VOLTS	575		PHASE	3	Hz 60
AMPS	231.3		CODE	G	S.F. 1.15
AMBIENT	40 °C		NOM. EFF. 95.8		MIN. EFF. 95
BEARINGS	6320C3 / 6316C3				RATING Cont.
SER. NO.	TBD		DESIGN	B	WT. 2684 LBS
PWM VFD DUTY	VT	CT	CP		S.F.
	3-60Hz	20-60Hz	60-90Hz		1

Connection Diagram

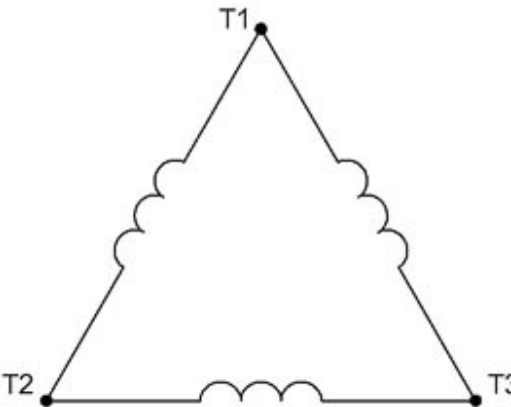


3 LEAD		SINGLE VOLTAGE			DELTA
VOLTAGE	CONN.	L1	L2	L3	
-	DELTA	1	2	3	

WD_3D

Thermal Limit Curves

Motor Type: AEHH8B		Catalogue No: APH25065-841		Family: Advantage Plus IEEE 841	
HP	250	Safe Stall Time		Full Load A	231.3 A
Voltage	575V 60Hz	Hot	12 s	% Inrush	631 %
RPM	1200	Cold	16 s	Locked Rotor A	1460 A

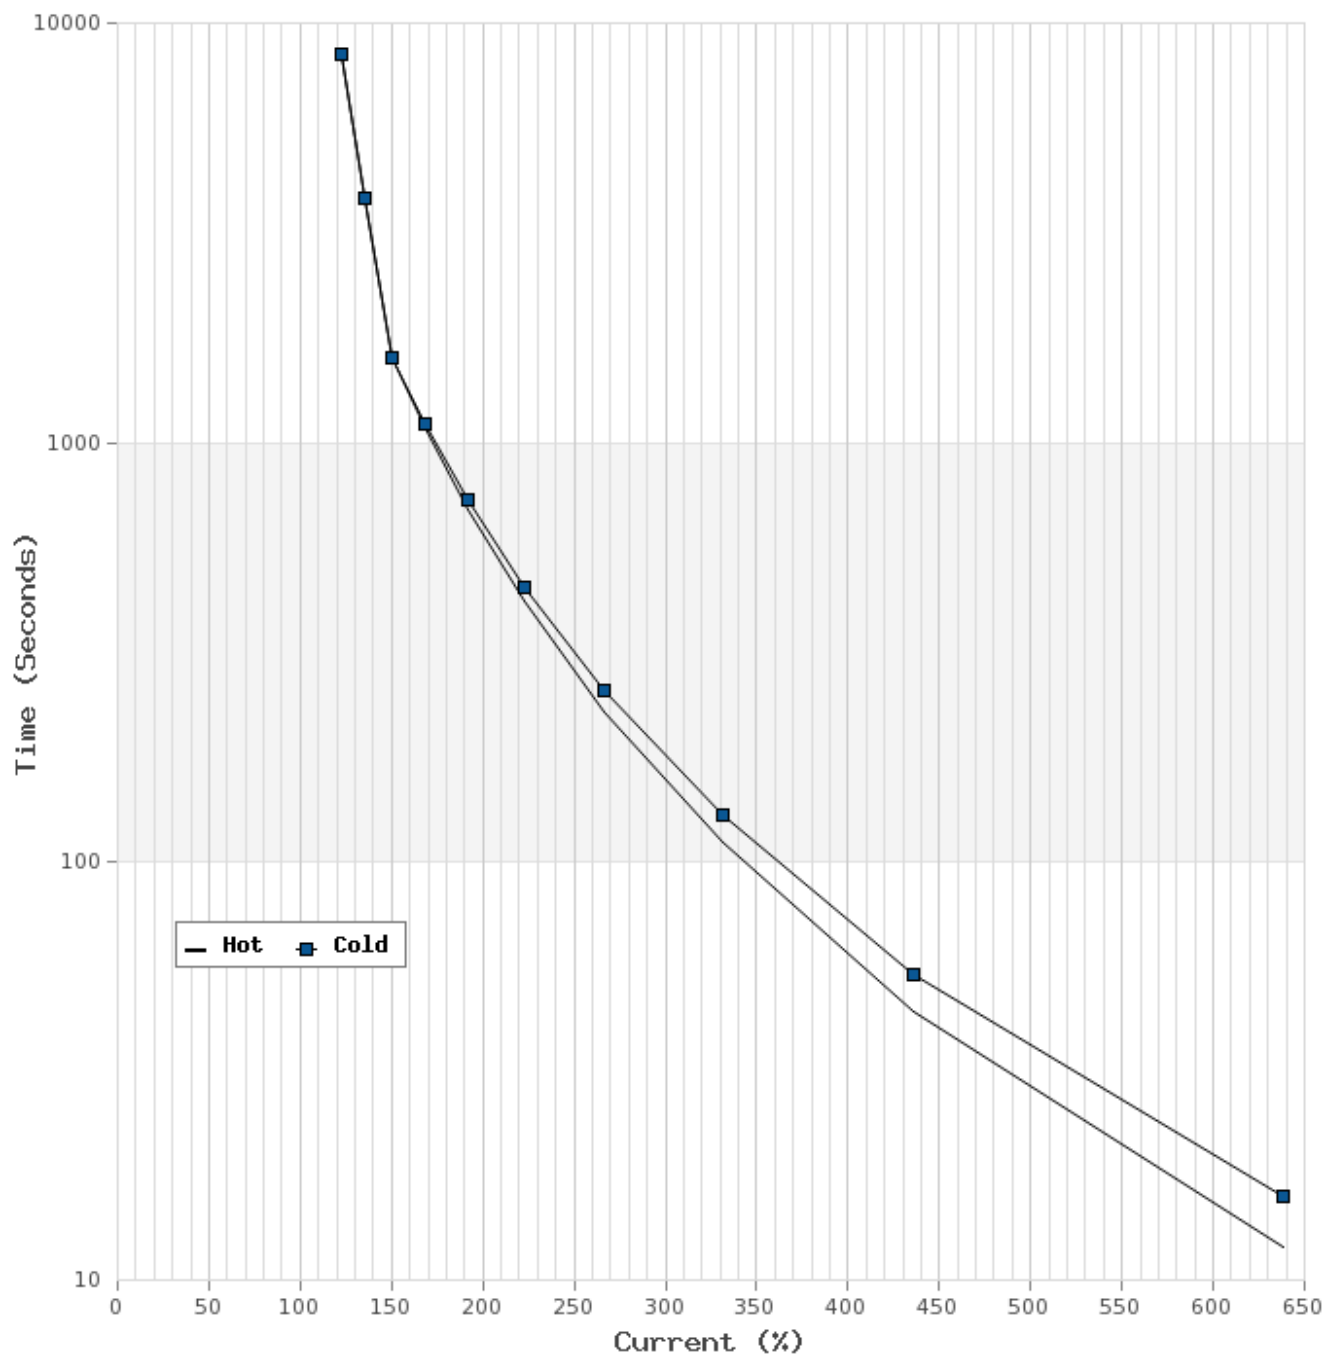

T-N and I-N Curves

Motor Type: AEHH8B		Catalogue No: APH25065-841		Family: Advantage Plus IEEE 841	
HP	250	Full Load T	1104 lb-ft	Full Load A	231.3 A
Voltage	575V 60Hz	Locked Rotor T	110 %	Locked Rotor A	1460.0 A
RPM	1200	Pull Up T	90 %	Break Down T	210 %

