

	Beaver Electrical Machinery Ltd.	
	No: 014726	
	Date: May 8, 2025	

Technical Documentation


APH7/54-841
Advantage Plus IEEE 841 | AEHH8B

Beaver Electrical Machinery Ltd.
No: 014726
Date: May 8, 2025

	Beaver Electrical Machinery Ltd.	
	No: 014726	
	Date: May 8, 2025	

Dimensional Drawing

Catalogue	Type	HP	RPM	Voltage	Hz	Frame Size
APH7/54-841	AEHH8B	7.5	1800	460	60	213T

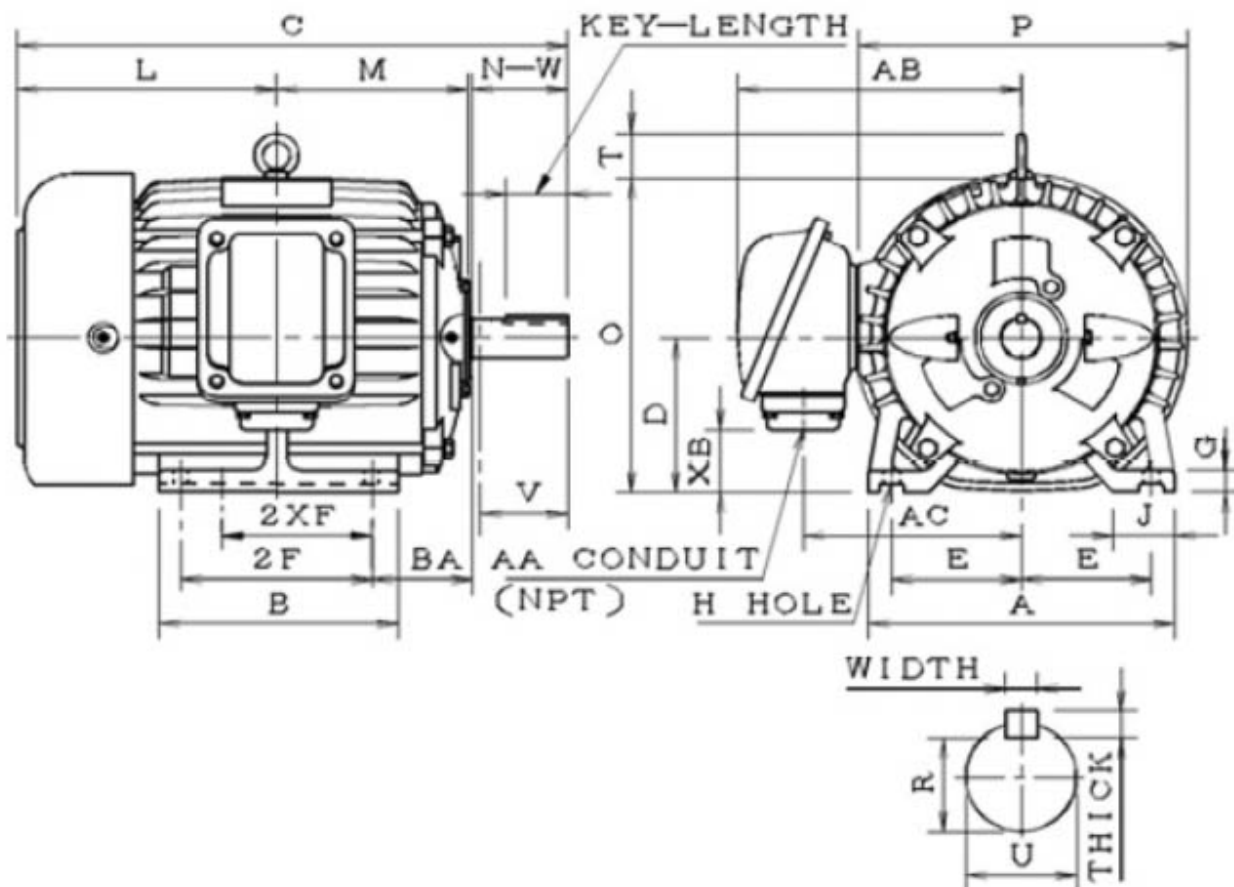

Mounting					A	B	C	CL1	CL2	D	G
E	2F1	2F2	H	BA							
4.25	5.5		0.41	3.5	9.85	6.89	18.26			5.25	0.7

J	K	L	M	O	P	T	Terminal Housing			
							AA	AB	AC	XB
1.75		8.63	6.1	10.62	11.1	1.65	NPT1"	9.78	7.34	2.34

Shaft Extension			Key			Keyseat
N-W	U	V	Width	Thick	Length	R
3.38	1.375	3.3	0.312	0.312	2.41	1.201

Bearings		Weight Lbs	Drive Method	Dimensions
DE	NDE			
6308ZC3	6306ZC3	174	Direct Coupling / Belt Drive	Inches

	Beaver Electrical Machinery Ltd.	
	No: 014726	
	Date: May 8, 2025	

Technical Data Sheet

Motor Type: AEHH8B	Catalogue No: APH7/54-841
--------------------	---------------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
7.5	4	1755	213T	460	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
91.70	90.20	91.00	89.50	86.50	82.00	72.00
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
22.44	250	155	270	2.8	8.9	64.00
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
H	0.848	39.00	110.00	29	20	60.0

VFD Duty Information

MAX HP	Current (A)	Speed Range			VFD		S.F.
		CT	VT	CHP	Carrier Hz	Type	
7.5	8.85	6-60Hz	3-60Hz	60-120Hz	3-6kHz	VPWM or CPWM	1.0

Hazardous Locations Information

Additional Certifications

CSA Certified	Other Certification
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	
Temp Code (Sinewave / VFD)	T3C / T3B

Additional Information


Bearings		Approx. Weight
DE	NDE	lbs
6308ZC3	6306ZC3	174

	Beaver Electrical Machinery Ltd.	
	No: 014726	
	Date: May 8, 2025	

Nameplate Drawing

Advantage Plus IEEE 841					
TYPE	AEHH8B		CAT. NO.	APH7/54-841	
OUTPUT	7.5 HP 5.60 kW		FRAME	213T	TEFC
R.P.M.	1755		POLE	4	INS. F
VOLTS	460		PHASE	3	Hz 60
AMPS	8.9		CODE	H	S.F. 1.15
AMBIENT	40 °C		NOM. EFF. 91.70		MIN. EFF. 90.20
BEARINGS	6308ZC3 / 6306ZC3				RATING Cont.
SER. NO.	TBD		DESIGN	B	WT. 174 LBS
PWM VFD DUTY	VT	CT	CP		S.F.
	3-60Hz	6-60Hz	60-120Hz		1.0

Connection Diagram

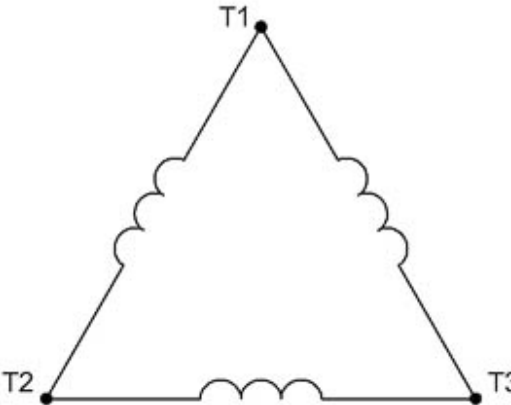


3 LEAD		SINGLE VOLTAGE			DELTA
VOLTAGE	CONN.	L1	L2	L3	
-	DELTA	1	2	3	

WD_3D


Thermal Limit Curves

Motor Type: AEHH8B		Catalogue No: APH7/54-841		Family: Advantage Plus IEEE 841	
HP	7.5	Safe Stall Time		Full Load A	8.9 A
Voltage	460V 60Hz	Hot	20 s	% Inrush	723 %
RPM	1800	Cold	29 s	Locked Rotor A	64.00 A

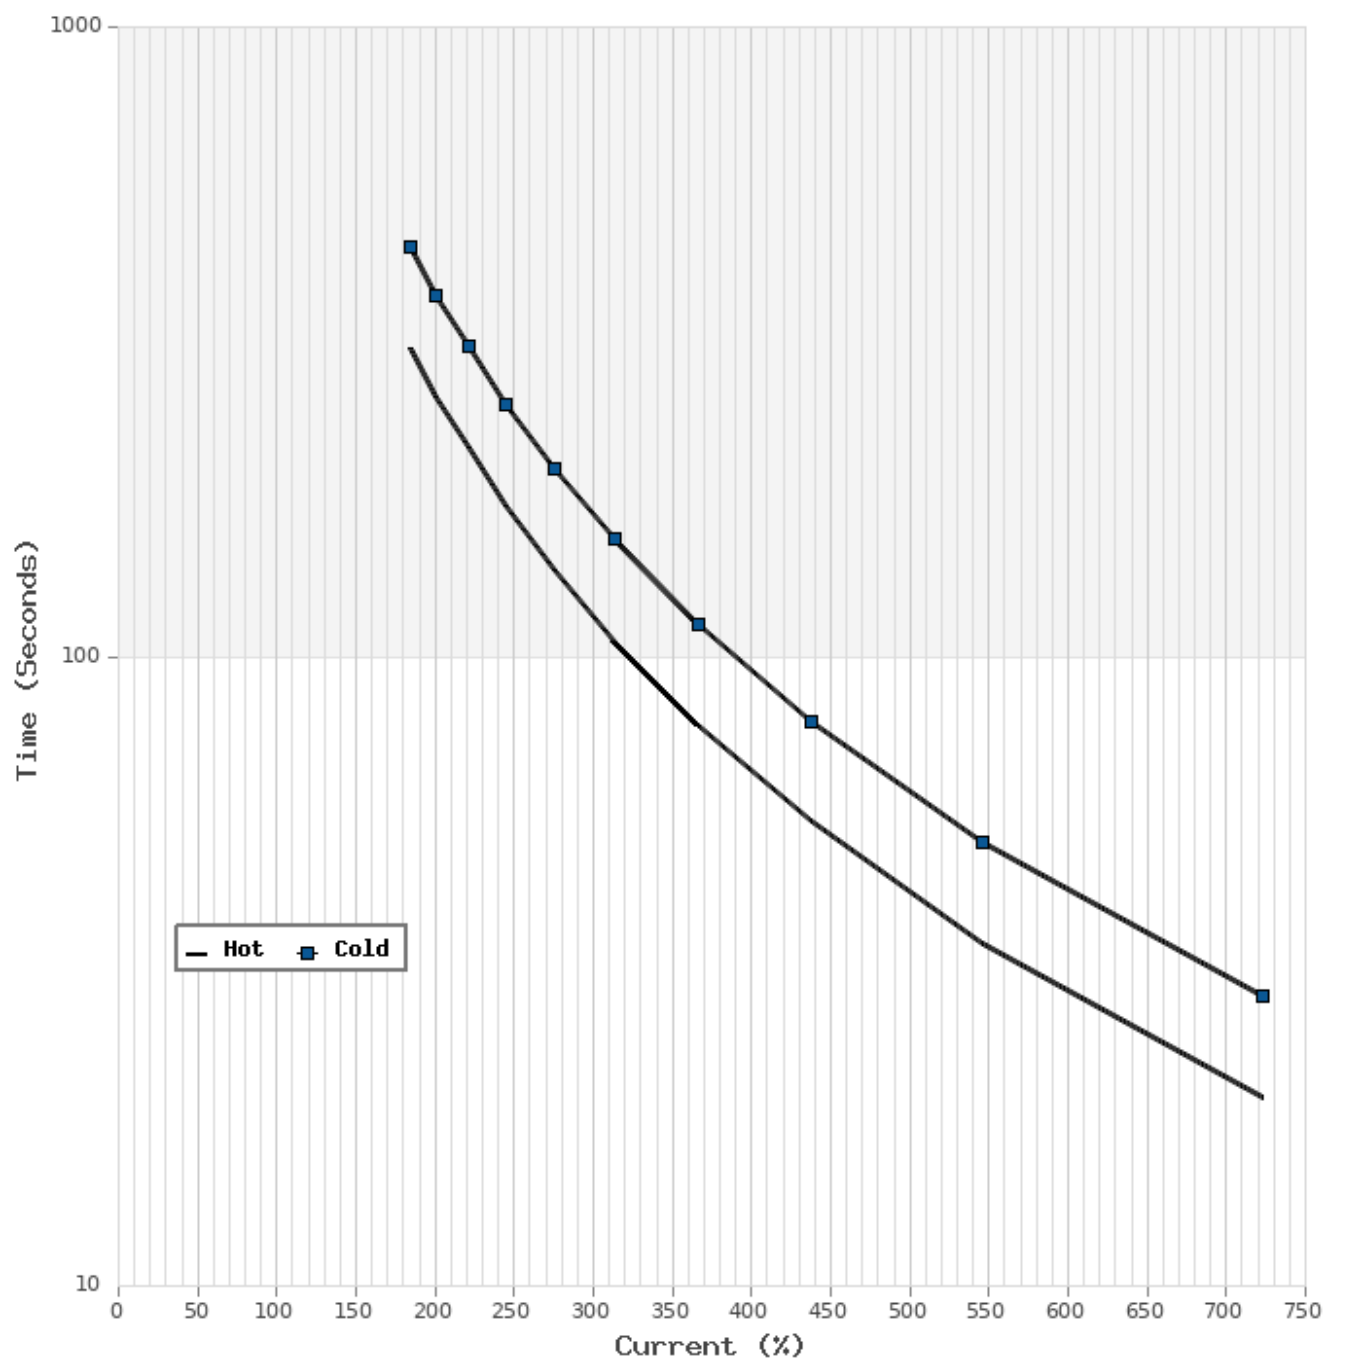

T-N and I-N Curves


Motor Type: AEHH8B		Catalogue No: APH7/54-841		Family: Advantage Plus IEEE 841	
HP	7.5	Full Load T	22.44 lb-ft	Full Load A	8.9 A
Voltage	460V 60Hz	Locked Rotor T	250 %	Locked Rotor A	64.0 A
RPM	1800	Pull Up T	155 %	Break Down T	270 %

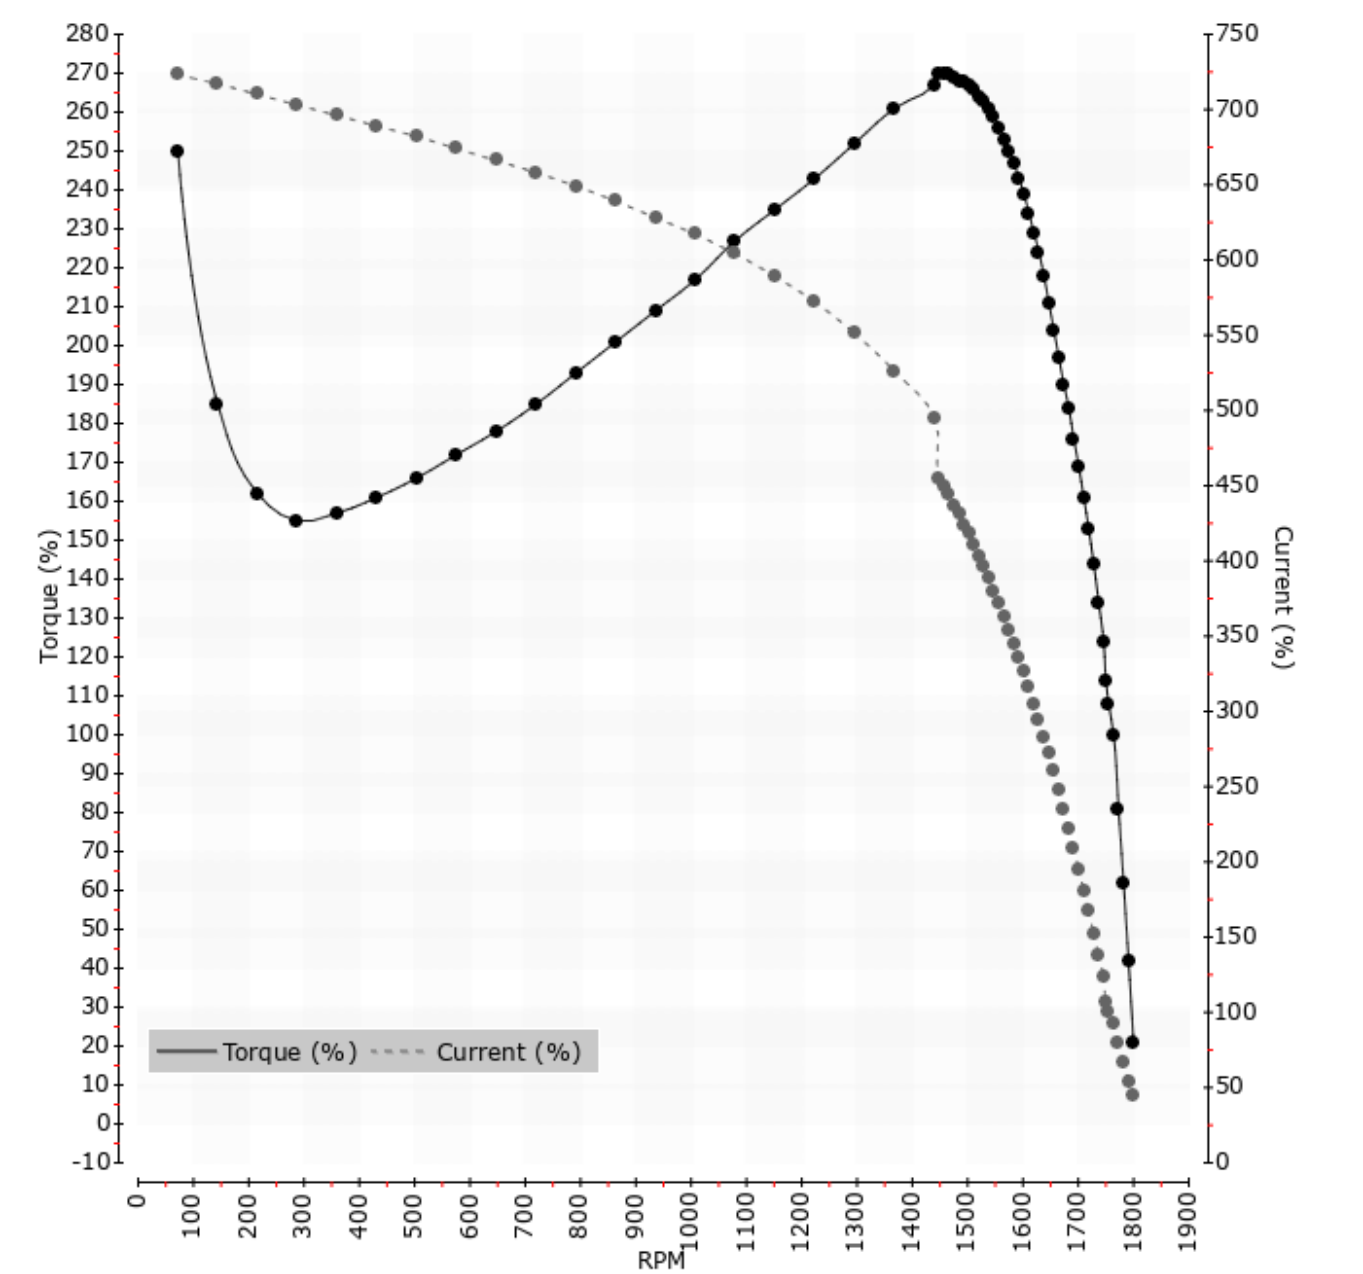

TECO  Westinghouse MOTORS (CANADA) INC.	Beaver Electrical Machinery Ltd.	
	No: 014726	
	Date: May 8, 2025	

Dimensional Drawing (50 Hz)

Catalogue	Model	HP	Pole	kW	Rating	Voltage	Hz	RPM
APH7/54-841	AEHH8B	7.5	4	5.60	Continuous	380	50	1440

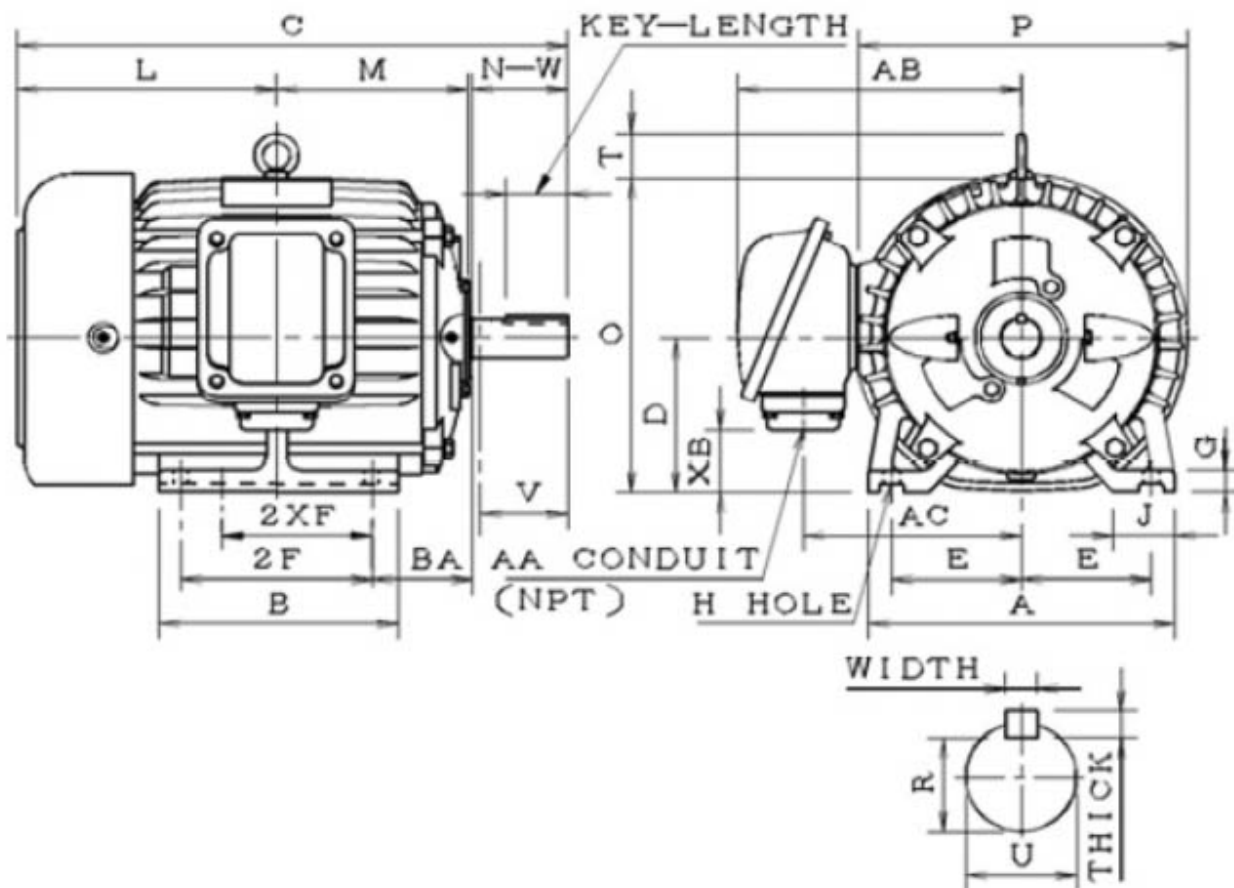

Frame Size		Mounting					A	B	C	CD	D
		E	2F	2F2	H	BA					
213T		4.25			0.41	3.5	9.85	6.89	18.26		5.25
G	J	K	L	M	O	P	T	Key			Keyseat
								Width	Thick	Length	R
0.7	1.75		8.63	6.1	10.62	11.1	1.65	0.312	0.312	2.41	1.201
Terminal Housing				Aux Box			C/D Flange				
AA	AB	AC	XB	AE	AX	BB	AH	AK	BD	AJ	BF
NPT1"	9.78	7.34	2.34								
Shaft Extension			Bearings		Approx. Weight Lbs	SPL dBA/3ft	Ins. Class	S.F.	Drive Method	Dimensions	
N-W	U	V	DE	NDE							
3.38	1.375	3.3	6308ZC3	6306ZC3	174	60.0	F	1.00	Direct Coupling / Belt Drive	Inches	

	Beaver Electrical Machinery Ltd.	
	No: 014726	
	Date: May 8, 2025	

Technical Data Sheet (50 Hz)

Motor Type: AEHH8B	Catalogue No: APH7/54-841
--------------------	---------------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
7.5	4	1440	213T	380	50	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.00	Continuous	B	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
89.50	87.50	91.00	91.00	88.00	84.00	76.00
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
27	190	155	220	3.3	10.8	84.00
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
J	0.848	60.8	130.00	17	12	60.0

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
6-50Hz	3-50Hz	50-100Hz	3-6kHz	VPWM or CPWM	1.0

Hazardous Locations Information

Additional Certification

CSA Certified	Other Certification
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	
Temp Code (Sinewave / VFD)	T3C / T3B

Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6308ZC3	6306ZC3	174