



Beaver Electrical Machinery Ltd.

Date: August 11, 2022





Technical Documentation

FD0024

Farm Duty | BECSFD

Beaver Electrical Machinery Ltd.

Date: August 11, 2022

	Beaver Electrical Machinery Ltd.	
	Date: August 11, 2022	

Technical Data Sheet

Motor Type: BECSFD	Catalogue No: FD0024
--------------------	----------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
2	4	1750	182T	115 / 230	60	1
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous		-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
73				63.5		
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
6	340		330		28.0 / 14.0	178 / 89
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	

VFD Duty Information

Max HP	Current (A)	Speed Range		VFD		S.F.
		Constant Torque	Variable Torque	Carrier Hz	Type	

Hazardous Locations Information



Temp Code (Sinewave / VFD)	/
----------------------------	---

Additional Certifications

Other Certification

Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6306ZZ	6306ZZ	92


	Beaver Electrical Machinery Ltd.	
	Date: August 11, 2022	

Nameplate Drawing

Farm Duty					
TYPE	BECSFD	CAT. NO.	FD0024		
OUTPUT	2 HP 1.49 kW	FRAME	182T	TEFC	
R.P.M.	1750	POLE	4	INS.	F
VOLTS	115 / 230	PHASE	1	Hz	60
AMPS	28.0 / 14.0	CODE		S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 73		MIN. EFF.	
BEARINGS	6306ZZ / 6306ZZ			RATING Cont.	
SER. NO.	TBD	DESIGN		WT. 92 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	



Connection Diagram

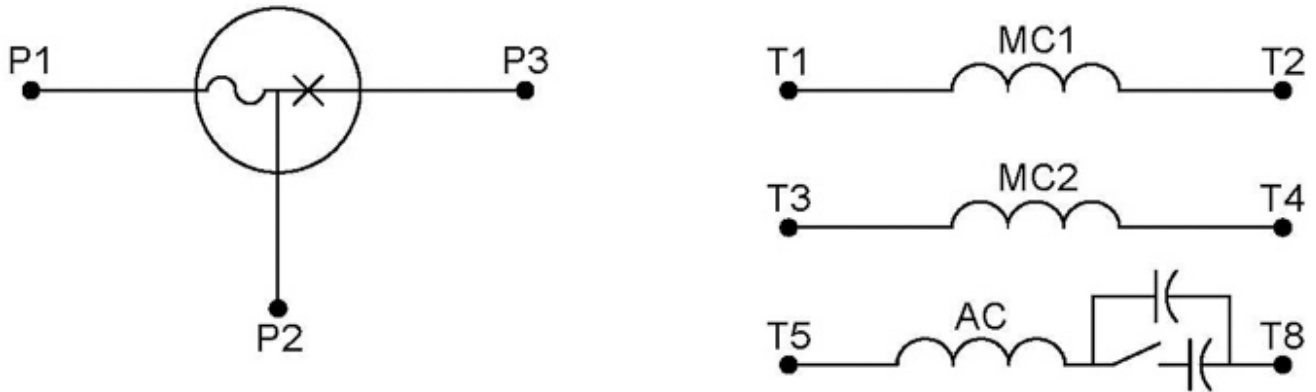

9 LEAD DUAL VOLTAGE		CAP START/ CAP RUN		
VOLTAGE	ROTATION	L1	L2	JOIN
HIGH	CCW	P1	4	2&3&5, P2&8
	CW	P1	4	2&3&8, P2&5
LOW	CCW	P1	2,4,5	P2,3,8
	CW	P1	2,4,8	P2,3,5

WD_9CSCR