




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

**SVR SERIES
 SPECIFICATION SHEET**


**1 PHASE ISOLATION TRANSFORMER
 TYPE: DRY TYPE**

CAT. NO.: SVR100H-G8A3
 KVA: 100
 PRIMARY VOLT: 208
 SECONDARY VOLT: 120/240
 PHASE: 1
 FREQ: 60 HZ
 WEIGHT: 730 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 IMPEDANCE: 4.5-5.5%
 WINDING: ALUMINUM
 ENCLOSURE: NEMA 2
 NEMA 3R WITH OPTIONAL KIT
 EFF. STANDARDS: NRCAN 2019, DOE 2016
 APPROVALS: UL, CSA

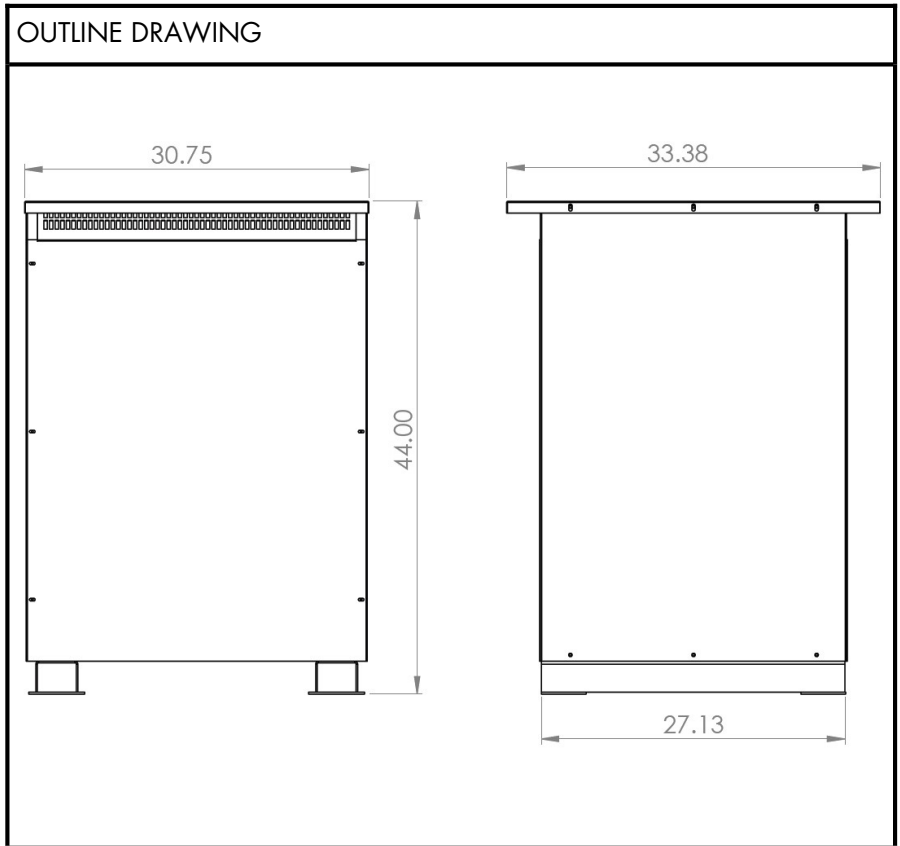

WIRING AND CONNECTION DIAGRAM

PRI VOLT	% TAPS	JUMPERS TO	SEC VOLT	SEC CONN
218	105.0	1-1-1	240	X1-X2
213	102.5	2-2-2	120	X0-X1 OR X0-X2
208	100.0	3-3-3		
203	97.5	4-4-4		
198	95.0	5-5-5		

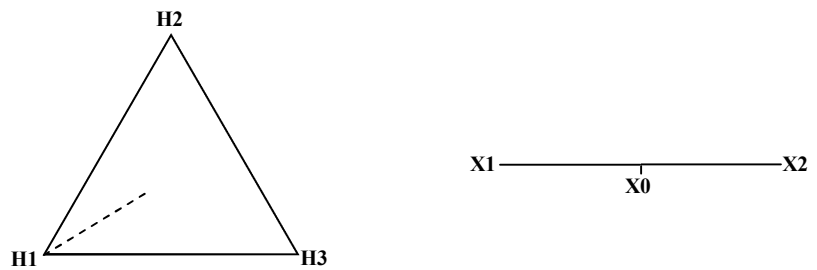

NOTE: Specifications and dimensions subject to change without notice