




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

SVR SERIES SPECIFICATION SHEET

1 PHASE ISOLATION TRANSFORMER TYPE: DRY TYPE


CAT. NO.: SVR10T-G8A
 KVA: 10
 PRIMARY VOLT: 600
 SECONDARY VOLT: 240/120
 PHASE: 1
 FREQ: 60 HZ
 WEIGHT: 125 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 BIL: 10 KV
 IMPEDANCE: 6.0-7.0%
 WINDING: Aluminum
 ENCLOSURE: NEMA 1
 NEMA 3R WITH OPTIONAL KIT
 APPROVALS: UL, CSA

OUTLINE DRAWING

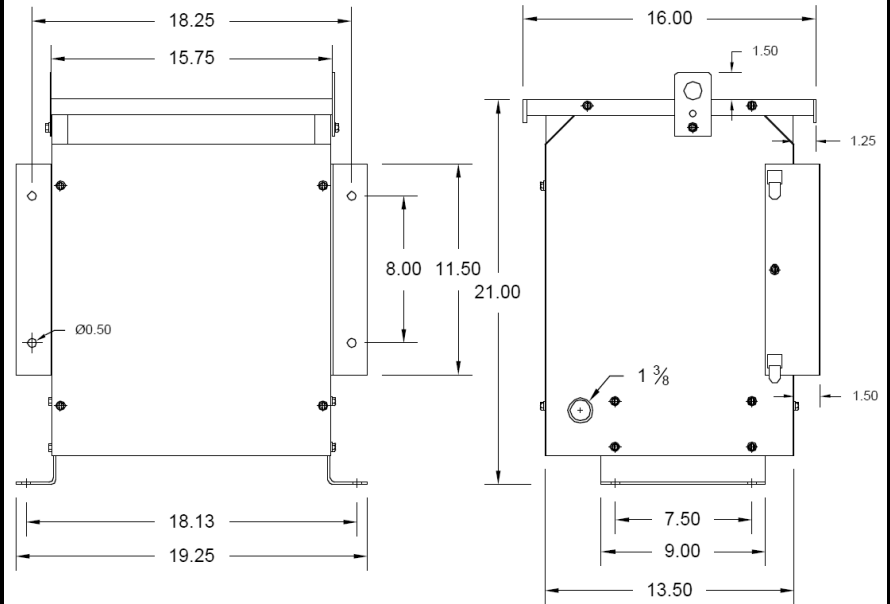

WIRING AND CONNECTION DIAGRAM

PRI VOLT	% Tap	JUMPER TAP	SEC VOLT	INTERCONNECT	SEC LINE CONN
630	105.0	1	240	X2 TO X3	X1 AND X4
600	100.0	2	120	X1 TO X3 X2 TO X4	X1 AND X4
570	95.0	3	120/240	X2 TO X3	X1-X2-X4

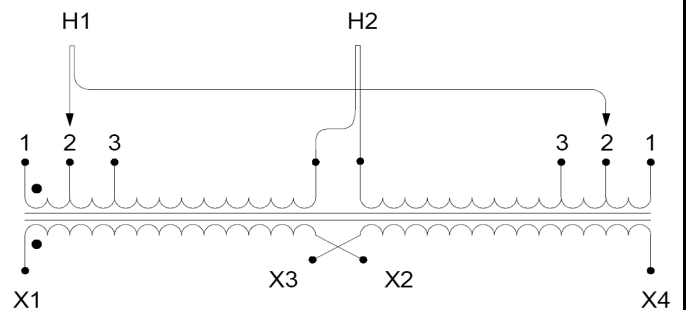

Specifications subject to change by Beaver engineering department