




BEAVER ELECTRICAL MACHINERY
7440 LOWLAND DRIVE, BURNABY, BC, CANADA
TEL: (604) 431-5000 FAX: (604) 431-5066
www.beaverelectrical.com

SVR SERIES SPECIFICATION SHEET

CAT. NO.: SVR5H-G8C
KVA: 5
PRIMARY VOLT: 208
SECONDARY VOLT: 240/120
PHASE: 1
FREQ: 60 HZ
WEIGHT: 80 LBS
INSUL. CLASS: 220°C
TEMP. RISE: 150°C
BIL: 10 KV
IMPEDANCE: 6.0-7.0%
WINDING: Copper
ENCLOSURE: NEMA 1
NEMA 3R WITH OPTIONAL KIT
APPROVALS: UL, CSA


1 PHASE ISOLATION TRANSFORMER TYPE: DRY TYPE

OUTLINE DRAWING

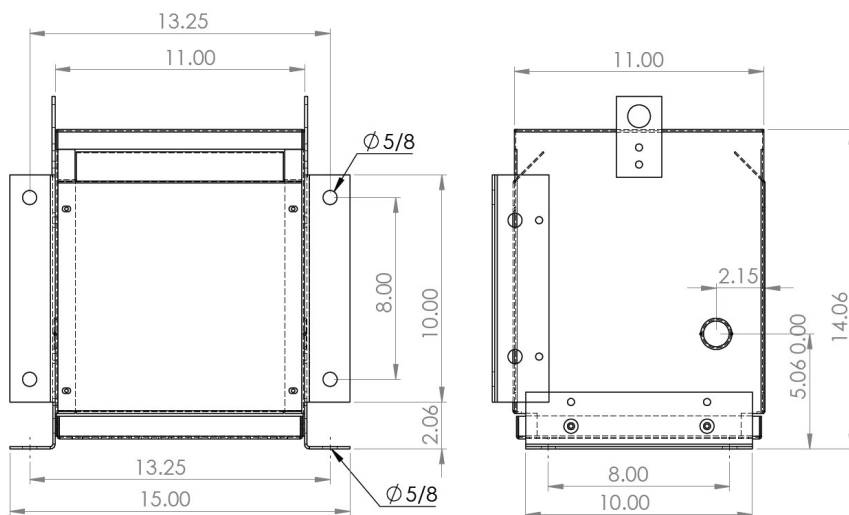

WIRING AND CONNECTION DIAGRAM

PRI VOLT	% Tap	JUMPER TAP	SEC VOLT	INTERCONNECT	SEC LINE CONN
218	105.0	1	240	X2 TO X3	X1 AND X4
208	100.0	2	120	X1 TO X3 X2 TO X4	X1 AND X4
197	95.0	3	120/240	X2 TO X3	X1—X2—X4

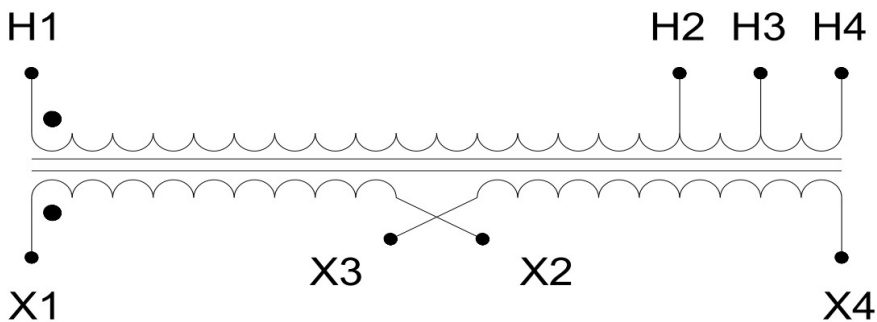

Specifications subject to change by Beaver engineering department