



SIDE

115 °C RISE
SINGLE PHASE .250-2 KVA


TOTALLY ENCLOSED
ENCAPSULATED DISTRIBUTION TRANSFORMERS
FRONT ACCESS AND BUCK-BOOST & 50 HZ.

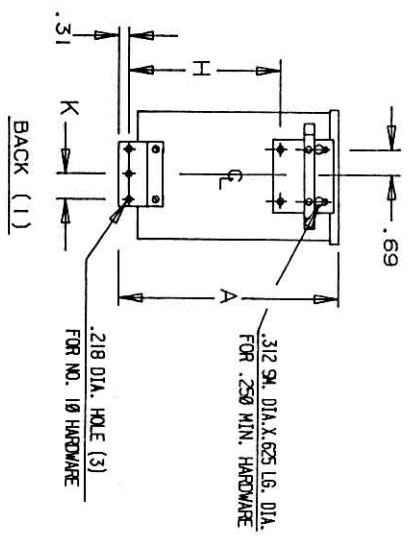

BACK (1)

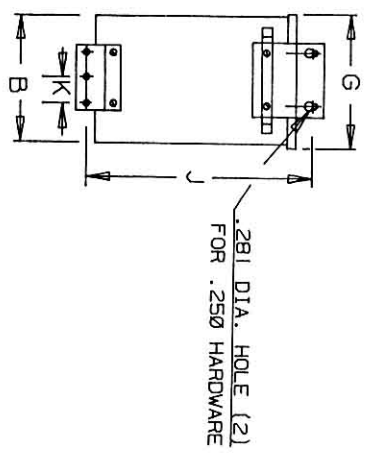

BACK (2)



BOTTOM

DIMENSIONS

	A	B	C	D	E	F	G	H	J	K	WT. LBS.
KVA											
.250	8.20	3.90	3.88	1.30	3.67	7.36	4.08	4.70	8.68	.94	10.0
.500	8.58	4.28	4.20	1.48	3.98	7.74	4.37	5.09	9.06	.94	15.0
.750	9.20	4.66	4.51	1.67	4.30	8.36	4.75	5.71	9.68	.94	19.0
1.000	10.02	5.40	5.13	1.67	4.92	9.18	5.50	6.53	10.50	1.50	24.0
1.500	11.14	5.40	5.13	1.67	4.92	10.30	5.50	7.65	11.62	1.50	30.0
2.000	12.52	5.40	5.13	1.67	4.92	11.68	5.50	9.03	13.00	1.50	38.0

NOTES:

1. TRANSFORMER SLIPS ONTO MOUNTING BRACKET (BACK (1)) BACK SLIP-ON WALL MOUNTING.
2. TRANSFORMER BOLTS ONTO MOUNTING BRACKET (BACK (2)). BACK RIGID WALL MOUNTING.
3. METHOD OF INSERTION OF BRACKET DETERMINES THE TYPE OF MOUNTING; SAME BRACKET FOR BOTH TYPES.
4. DOUBLE KNOCKOUTS:
1.13 DIA. FOR .75 CONDUIT
.88 DIA. FOR .50 CONDUIT
5. FRONT ACCESS NOT AVAILABLE ON BUCK - BOOST.

Acme Electric Corp.
LUMBERTON, N.C.

OUTLINE

TYPE NO.

DRAWN SJ HANT 1/11/90 DATE

DESIGN

CHK. SJH APP. JLH

MAT'L

FINISH

SCALE NONE SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCE ON 3 PLACE DECIMALS ± .005

DO NOT SCALE DRAWING

79 790 DC L E PRINTS TO CONTROL 7 SIZE B-700070-01

CADD DWG. 70007001