


Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1-H4		
570	H1-H3		
540	H1-H2		
Secondary Volts			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4

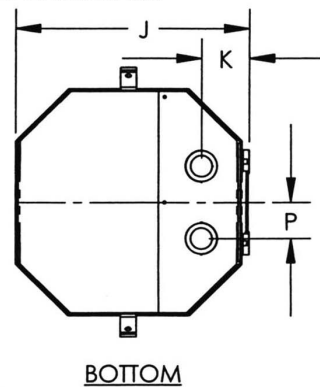

ACME ELECTRIC

Type No.

KVA	CATALOG NUMBER	VOLTAGAGE		Enclosure	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
15	T-2-53617-1S	600	120/240	NEMA-3R	170	1	60 Hz

Winding Rise	115°C
Insulation	180°C
Sound Level	45 dB

TYPICAL PERFORMANCE DATA

Regulation @ 100% PF	
----------------------	--

IMPEDANCE	3.35
-----------	------

Typical Efficiency	
Full Load Losses	
No Load Losses	

DATE: Dec 23, 2008

A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
14.12	15.93	14.56	11.59	4.54	11.75	16.94	11.62	11.38	2.68	2.44	3.00	3.13	2.00	3.00

A

PRINTS TO

CONTROL 7

T-2-53617-1S