
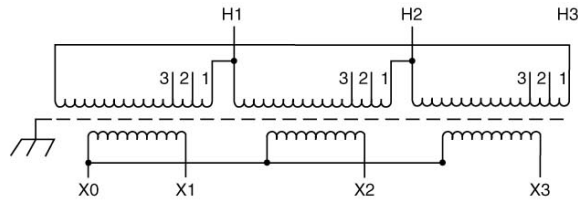
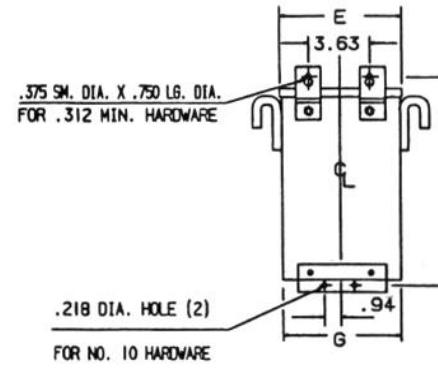




# Revisions



Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1, H2, H3	1	
570	H1, H2, H3	2	
540	H1, H2, H3	3	

**Secondary Volts**

208		X1, X2, X3
120 1 phase		X1 to X0 X2 to X0 X3 to X0



BOTTOM

**NOTES:**

**1. KNOCKOUTS:**

1.69 DIA. FOR 1.25 CONDUIT  
1.13 DIA. FOR .75 CONDUIT

KVA	CATALOG NUMBER		VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
			HIGH	LOW				
3.0	<b>T-2A-79330-1S</b>		600Δ	208Y/120		75 Lbs	3φ	60 Hz
	A	B	C	D	E	F	G	H
	12.37	11.63	7.12	9.06	9.87	10.89	9.75	7.47

Insulation:	180°C	Encapsulated	Temp Rise:	115°C
-------------	-------	--------------	------------	-------

ACME  ELECTRIC

Type No.

DATE:

Feb 14, 2014

A

PRINTS TO

CONTROL  
7