




**BEAVER ELECTRICAL MACHINERY**  
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA  
 TEL: (604) 431-5000 FAX: (604) 431-5066  
 www.beaverelectrical.com

## R SERIES SPECIFICATION SHEET


## 3 PHASE ISOLATING TRANSFORMER DRY TYPE FLOOR MOUNT

CAT. NO.: TVR112T-T34A  
 KVA: 112.5  
 PRIMARY VOLT: 600▲  
 SECONDARY VOLT: 600Y/347  
 PHASE: 3  
 FREQ: 60 HZ  
 WINDING MATL: ALUMINUM  
 WEIGHT: 690 LBS  
 INSUL. CLASS: 220°C  
 TEMP. RISE: 150°C  
 IMPEDANCE: 4.5-5.5%  
 TAPS: FULL CURRENT  
 BIL: 10 kV  
 ENCLOSURE: TYPE 2  
 TYPE 3R with optional kit  
 APPROVALS: UL, CSA

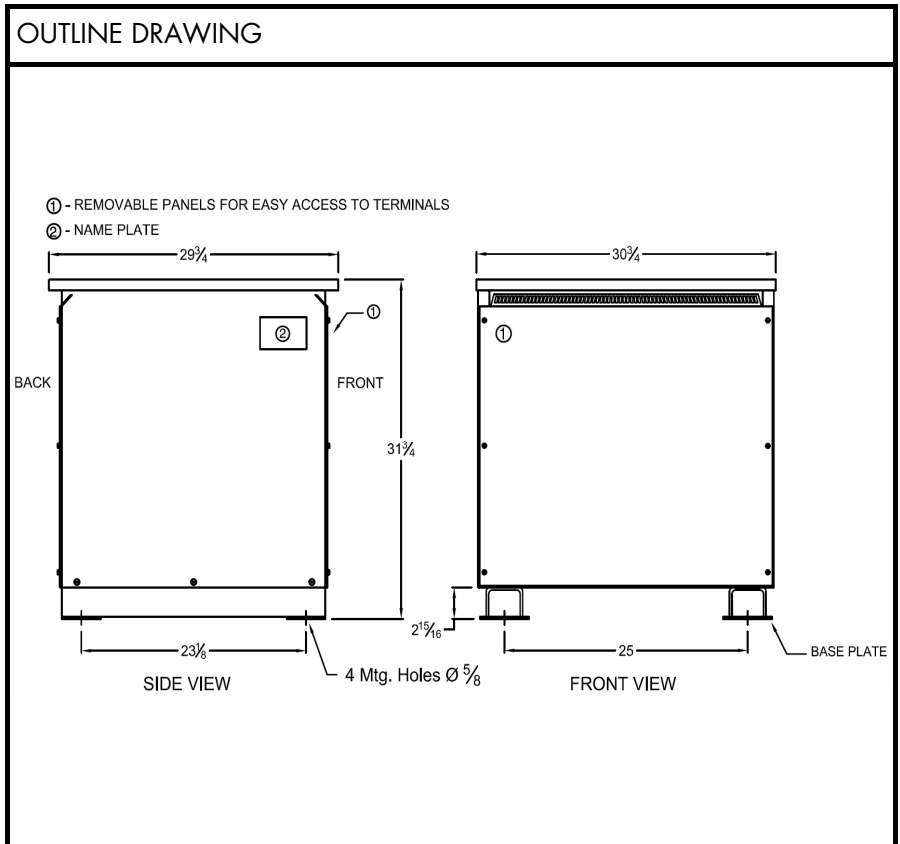

### WIRING AND CONNECTION DIAGRAM

PRI VOLT	JUMPERS TO	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
630	1-1-1	H1, H2, H3	600	3	X1, X2, X3
615	2-2-2	H1, H2, H3	347	1	BETWEEN X0 AND X1 or X2 or X3
600	3-3-3	H1, H2, H3			
585	4-4-4	H1, H2, H3			
570	5-5-5	H1, H2, H3			

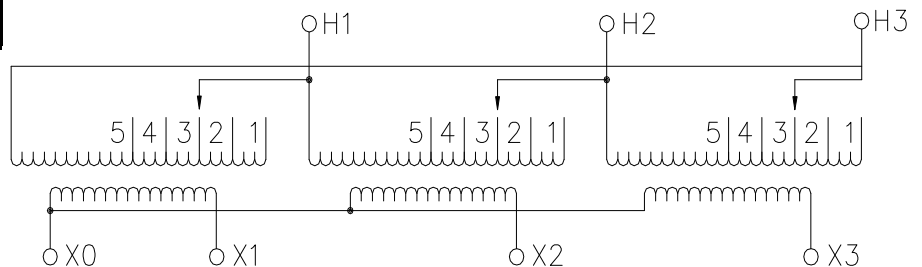

NOTE: Specifications and dimensions subject to change without notice