




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

R SERIES SPECIFICATION SHEET

3 PHASE TRANSFORMER DRY TYPE FLOOR MOUNT


CAT. NO.: TVR150S-K34A
 KVA: 150
 PRIMARY VOLT: 480▲
 SECONDARY VOLT: 240Y/139
 PHASE: 3
 FREQ: 60 HZ
 WINDING MATL: ALUMINUM
 WEIGHT: 970 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 IMPEDANCE: 4.5-5.5%
 TAPS: SEE BELOW
 BIL: 10 kV
 ENCLOSURE: NEMA 2
 NEMA 3R with optional kit
 APPROVALS: UL, CSA

OUTLINE DRAWING

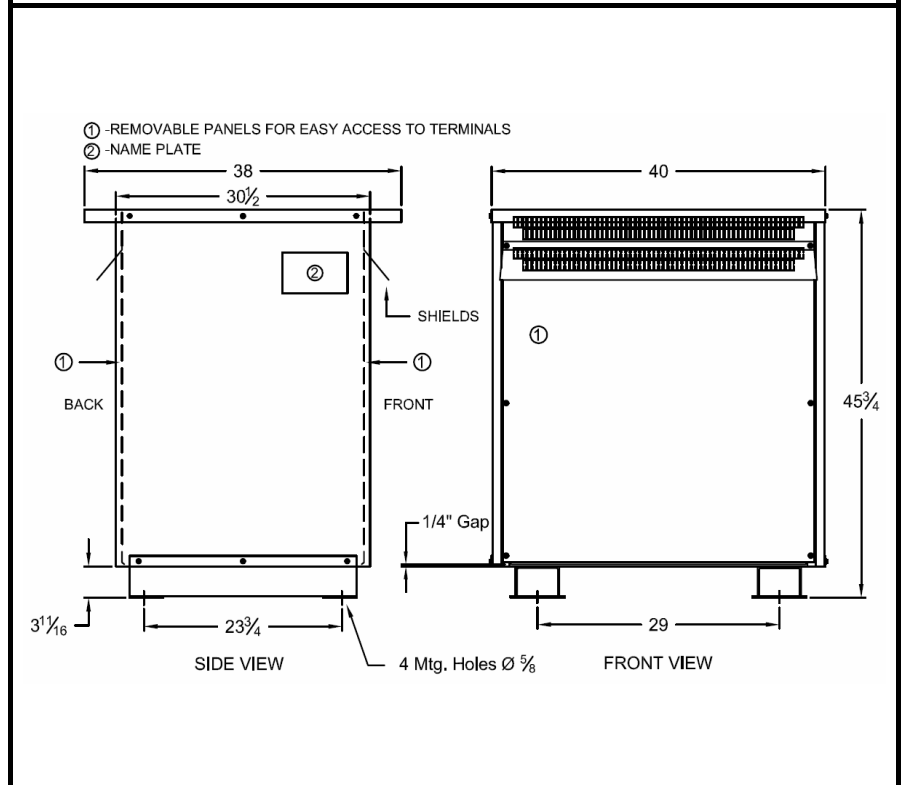

WIRING AND CONNECTION DIAGRAM

PRI VOLT	JUMPERS TO	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
504	1-1-1	H1, H2, H3	240	3	X1, X2, X3
492	2-2-2	H1, H2, H3	139	1	BETWEEN X0 AND X1 or X2 or X3
480	3-3-3	H1, H2, H3			
468	4-4-4	H1, H2, H3			
456	5-5-5	H1, H2, H3			

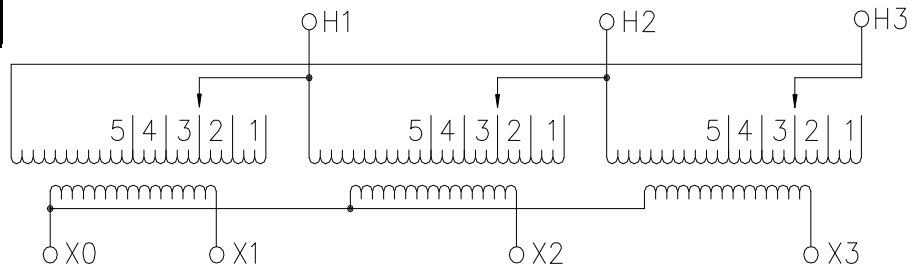

NOTE: Specifications and dimensions subject to change without notice