




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaveelectrical.com

**TVR SERIES
 SPECIFICATION SHEET**


**3 PHASE TRANSFORMER
 TYPE: DRY TYPE
 FLOOR OR WALL MOUNT**

CAT. NO.: TVR20H-H34A3
 KVA: 20
 Primary Volt: 208 ▲
 Secondary Volt: 208Y/120
 Phase: 3
 Frequency: 60 HZ
 Winding Matl.: Aluminum
 Weight: 214 LBS
 Insulation Class: 220°C
 Temperature Rise: 150°C
 Impedance: 5.0-6.0%
 Eff. @ 35% load: 97.5%
 BIL: 10 kV
 Enclosure: TYPE 2
 NEMA 3R with optional kit
 EFF. STANDARDS: NRCAN 2019, DOE 2016
 Approvals: UL, CSA

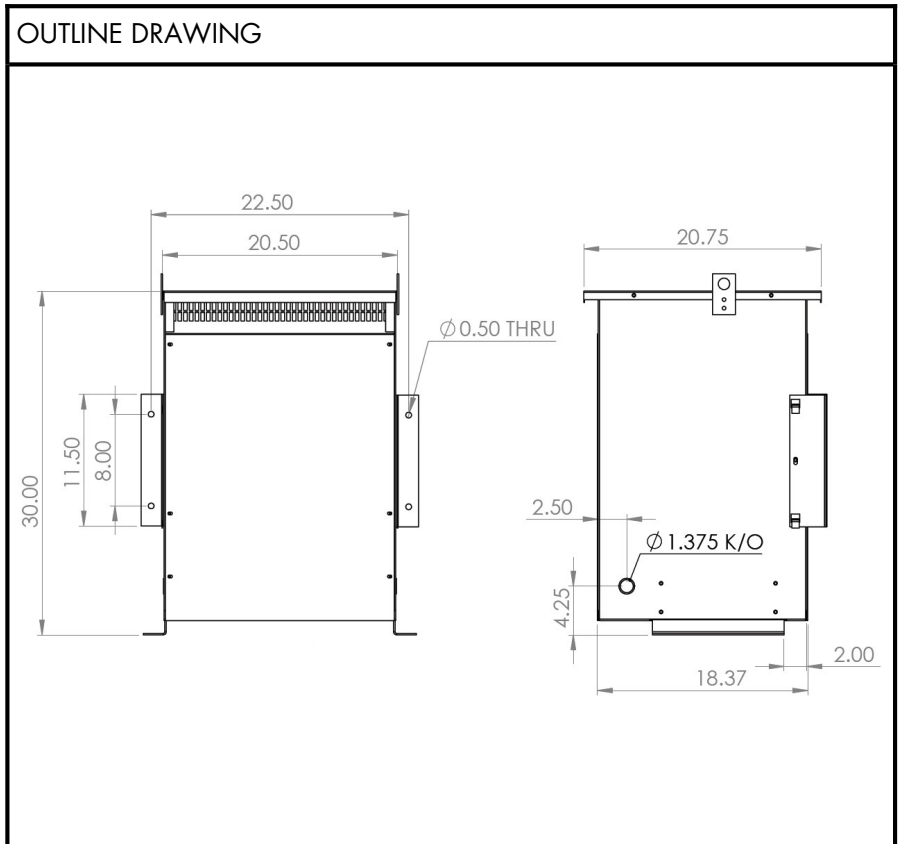

WIRING AND CONNECTION DIAGRAM

PRI VOLT	JUMPERS TO	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
218.4	1-1-1	H1, H2, H3	208	3	X1, X2, X3
213.2	2-2-2	H1, H2, H3	120	1	BETWEEN X0 AND X1 or X2 or X3
208	3-3-3	H1, H2, H3			
202.8	4-4-4	H1, H2, H3			
197.6	5-5-5	H1, H2, H3			

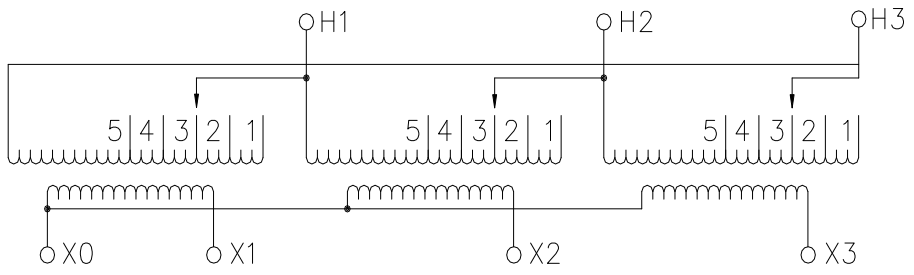

NOTE: Specifications and dimensions subject to change without notice