




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

**TVR SERIES
 SPECIFICATION SHEET**



**3 PHASE TRANSFORMER
 TYPE: DRY TYPE
 FLOOR MOUNT**

CAT. NO.: TVR225H-S34A3
 KVA: 225
 PRIMARY VOLT: 208 ▲
 SECONDARY VOLT: 480Y/277
 PHASE: 3
 FREQ: 60 HZ
 WINDING MATL: Aluminum
 WEIGHT: 1375 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 IMPEDANCE: 4.0-5.0%
 TAPS: SEE BELOW
 BIL: 10 kV
 ENCLOSURE: NEMA 2
 NEMA 3R with optional kit
 APPROVALS: UL, CSA

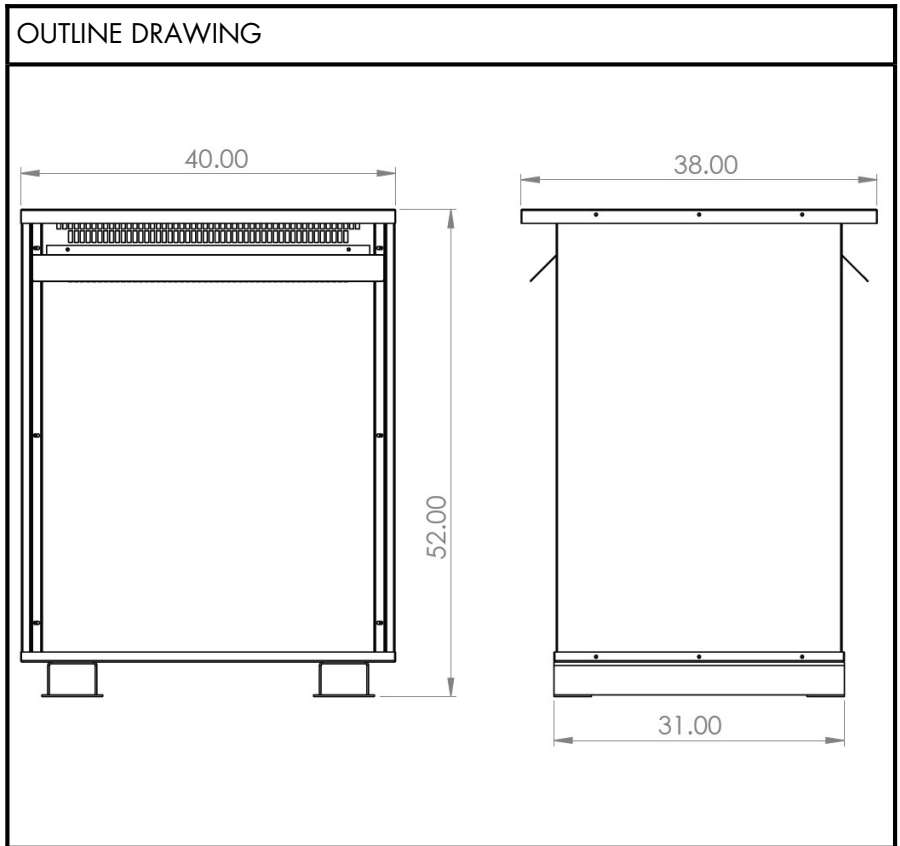

CONNECTION AND TAP INFORMATION

PRI VOLT	INTERCONNECT	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
218	1-2	X1, X2, X3	480	3	H1, H2, H3
208	2-3	X1, X2, X3	277	1	BETWEEN H0 AND H1 or H2 or H3
198	3-4	X1, X2, X3			



NOTE: Specifications and dimensions subject to change without notice