




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

**TVR SERIES
 SPECIFICATION SHEET**

**3 PHASE TRANSFORMER
 TYPE: DRY TYPE
 FLOOR MOUNT**


CAT. NO.: TVR300T-T34A
 KVA: 300
 PRI. VOLT: 600 ▲
 SEC. VOLT: 600Y/347
 PHASE: 3
 FREQ: 60 HZ
 WINDING MATL: Aluminum
 WEIGHT: 1870 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 IMPEDANCE: 5.0-6.0%
 Eff @ 35% load 98.60%
 ENCLOSURE: NEMA 3R
 BIL 10 KV
 APPROVALS: UL, CSA

OUTLINE DRAWING

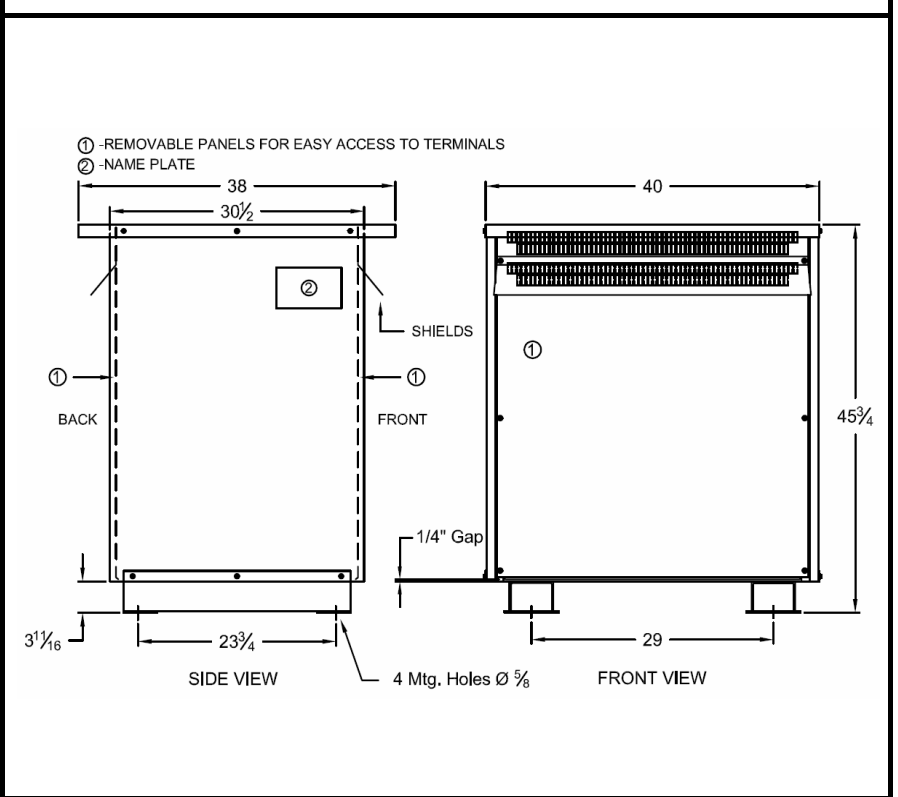

CONNECTION AND TAP INFORMATION

PRI VOLT	INTERCONNECT	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
630	1-2	H1, H2, H3	600	3	X1, X2, X3
615	2-3	H1, H2, H3	347	1	BETWEEN X0 AND X1 or X2 or X3
600	3-4	H1, H2, H3			
585	4-5	H1, H2, H3			
570	5-6	H1, H2, H3			

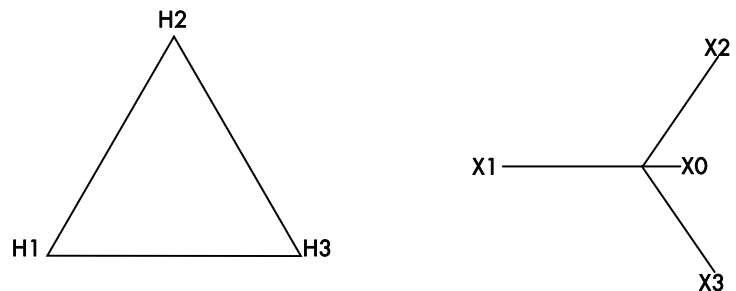

NOTE: Specifications and dimensions subject to change without notice