




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

TVR SERIES SPECIFICATION SHEET

3 PHASE TRANSFORMER TYPE: DRY TYPE FLOOR MOUNT



CAT. NO.: TVR750T-H34A3
 KVA: 750
 PRI. VOLT: 600▲
 SEC. VOLT: 208Y/120
 PHASE: 3
 FREQ: 60 HZ
 WINDING MATL: Aluminum
 WEIGHT: 4800 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 IMPEDANCE: 4.0-6.0%
 Eff. @ 35% load 99.23%
 BIL: 10 kV
 ENCLOSURE: CSA Type 2
 Type 3R with optional kit
 EFF. STANDARDS: NRCAN 2019, DOE 2016
 APPROVALS: UL, CSA

OUTLINE DRAWING

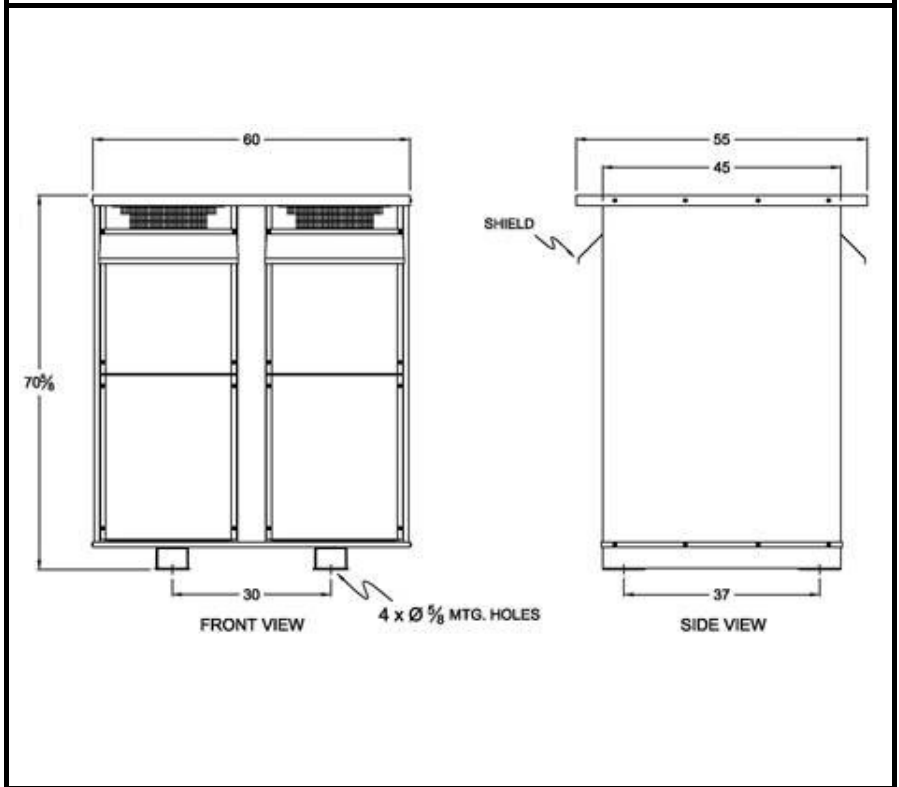

CONNECTION AND TAP INFORMATION

PRI VOLT	INTERCONNECT	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
630	1-2	H1, H2, H3	208	3	X1, X2, X3
615	2-3	H1, H2, H3	120	1	BETWEEN X0 AND X1 or X2 or X3
600	3-4	H1, H2, H3			
585	4-5	H1, H2, H3			
570	5-6	H1, H2, H3			



NOTE: Specifications and dimensions subject to change without notice