




BEAVER ELECTRICAL MACHINERY
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA
 TEL: (604) 431-5000 FAX: (604) 431-5066
 www.beaverelectrical.com

**TVR SERIES
 SPECIFICATION SHEET**


**3 PHASE TRANSFORMER
 DRY TYPE
 FLOOR MOUNT**

CAT. NO.: TVR300H-S34A3
 KVA: 300
 PRIMARY VOLT: 208 ▲
 SECONDARY VOLT: 480/277
 PHASE: 3
 FREQ: 60 HZ
 WINDING MATL: ALUMINUM
 WEIGHT: 1800 LBS
 INSUL. CLASS: 220°C
 TEMP. RISE: 150°C
 IMPEDANCE: 4.5-5.5%
 TAPS: SEE BELOW
 BIL: 10 kV
 ENCLOSURE: NEMA Type 2
 Type 3R with optional kit
 APPROVALS: UL, CSA

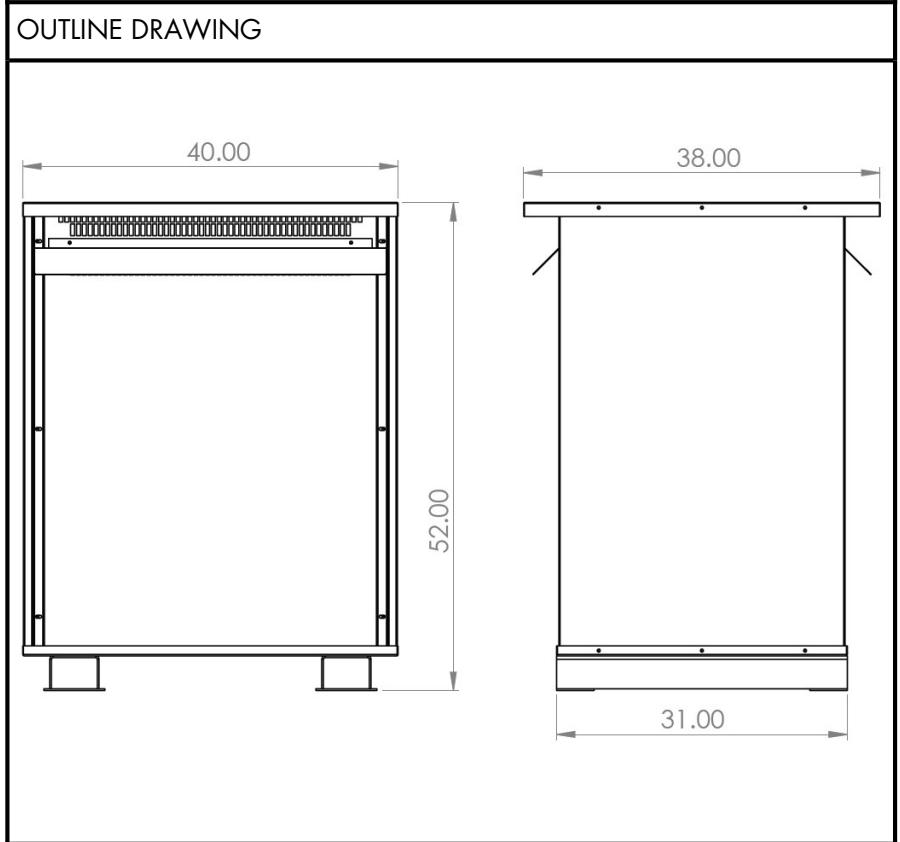

WIRING AND CONNECTION DIAGRAM

PRI VOLT	JUMPERS TO	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
218	1-1-1	X1-X2-X3	480	3	H1-H2-H3
213	2-2-2	X1-X2-X3	277	1	BETWEEN H0 AND H1 or H2 or H3
208	3-3-3	X1-X2-X3			
203	4-4-4	X1-X2-X3			
198	5-5-5	X1-X2-X3			

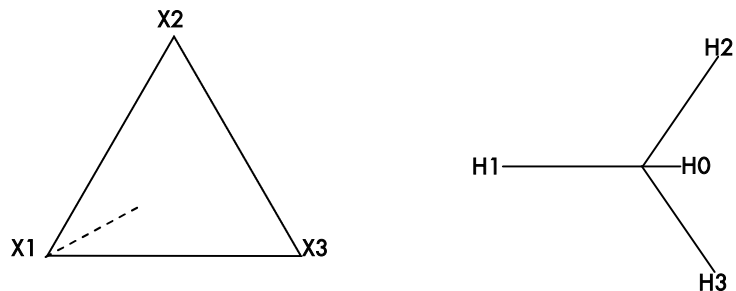

NOTE: Specifications and dimensions subject to change without notice