




**BEAVER ELECTRICAL MACHINERY**  
 7440 LOWLAND DRIVE, BURNABY, BC, CANADA  
 TEL: (604) 431-5000 FAX: (604) 431-5066  
 www.beaverelectrical.com

**TVR SERIES  
 SPECIFICATION SHEET**

**3 PHASE TRANSFORMER  
 DRY TYPE  
 FLOOR MOUNT**


CAT. NO.: TVR300H-T34A  
 KVA: 300  
 PRIMARY VOLT: 208 ▲  
 SECONDARY VOLT: 600Y/347  
 PHASE: 3  
 FREQ: 60 HZ  
 WINDING MATL: ALUMINUM  
 WEIGHT: 1800 LBS  
 INSUL. CLASS: 220°C  
 TEMP. RISE: 150°C  
 IMPEDANCE: 4.5-5.5%  
 TAPS: SEE BELOW  
 BIL: 10 kV  
 ENCLOSURE: NEMA Type 2  
 Type 3R with optional kit  
 APPROVALS: UL, CSA

**OUTLINE DRAWING**

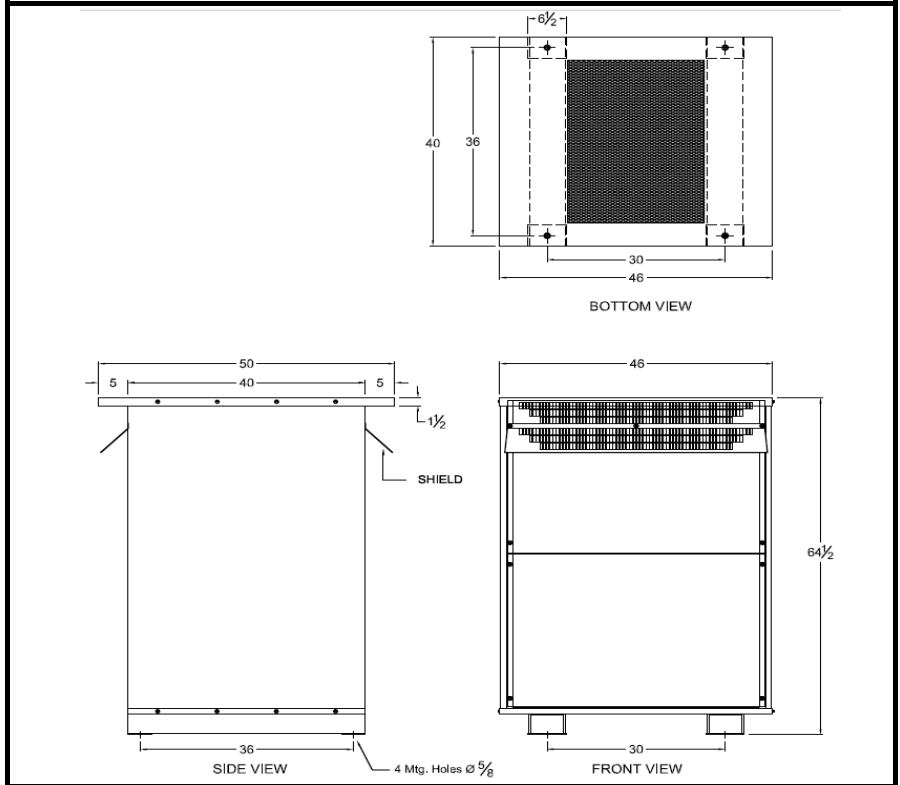

**WIRING AND CONNECTION DIAGRAM**

PRI VOLT	JUMPERS TO	PRI LINE CONN	SEC VOLT	PHASE	SEC LINE CONN
218	1-1-1	X1-X2-X3	600	3	H1-H2-H3
213	2-2-2	X1-X2-X3	347	1	BETWEEN H0 AND H1 or H2 or H3
208	3-3-3	X1-X2-X3			
203	4-4-4	X1-X2-X3			
198	5-5-5	X1-X2-X3			

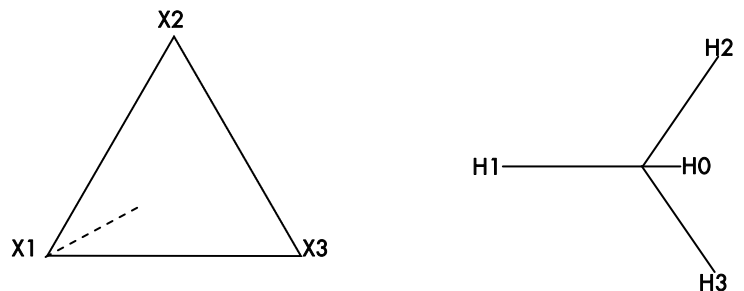

NOTE: Specifications and dimensions subject to change without notice